
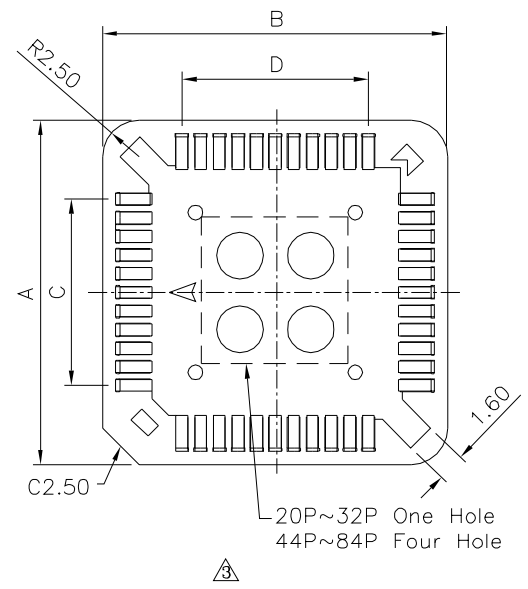


Recommended P.C.B. Layout

△△ SPECIFICATION
 Current Rating:1 Amp
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:500V AC/Mimute
 Temperature Range:-50°C To 105°C
 Insulator:PPS(UL94V-0),Brown
 Contact:Phosphor Bronze,Tin Plated Over Nickel
 RoHS Compliant

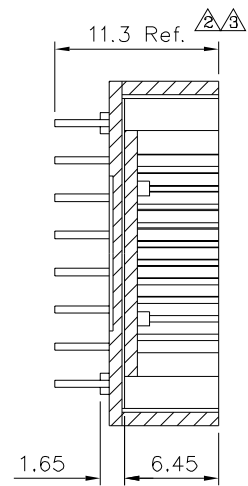

△ Contact	A±0.15	B±0.15	C±0.1	D±0.1	E±0.1	F±0.1
20	15.50	15.50	5.08	5.08	5.08	5.08
28	18.04	18.04	7.62	7.62	7.62	7.62
32	18.04	20.60	7.62	10.16	7.62	10.16
44	23.48	23.48	12.70	12.70	12.70	12.70
52	25.88	25.88	15.24	15.24	15.24	15.24
68	31.04	31.04	20.32	20.32	20.32	20.32
84	36.04	36.04	25.40	25.40	25.40	25.40

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. **08737**
 APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP
 SCALE NONE REV. A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.25
 .XX ±0.15
 ANG. ±2°
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	05/28/2020
△2	A2	Modify Data	HZF	12/30/2009
△1	A1	Modify Data	BECKY	08/23/2006
△0	A0	NEW RELEASE	BECKY	