


**SPECIFICATION**

Insulator: ABS  
 Terminal: Copper, Gold Plated  
 Lead Wire: UL 1061, 26 AWG, 7 Strand  
 Screw: 4-40 Nickel Plated Thumb Screw  
 RoHS Compliant

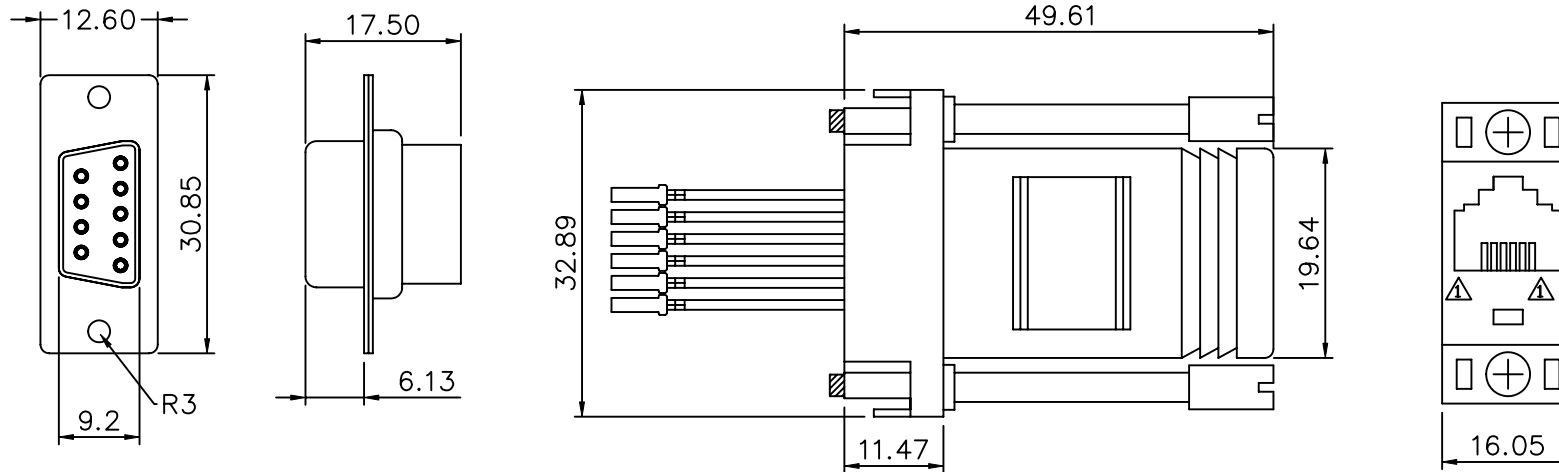

|       |       |       |     |       |        |      |   |   |   |    |
|-------|-------|-------|-----|-------|--------|------|---|---|---|----|
| A     | 1     | 2     | 3   | 4     | 5      | 6    | 7 | 8 | 9 | 10 |
| Color | White | Black | Red | Green | Yellow | Blue |   |   |   |    |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

08752

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

LXH

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.38

.XX ±0.25

AWG.


SCALE

NONE

REV.

A1

UNIT mm



NO. REV. A1 Del Pin

A NEW RELEASE

NO. REV.

REVISIONS

BECKY

2005/01/13

RAN

2003/06/10

CHK

DATE