
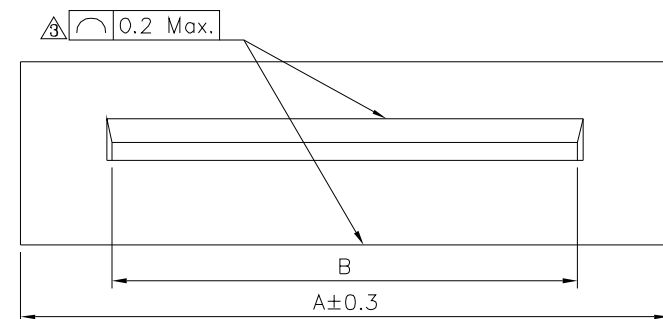
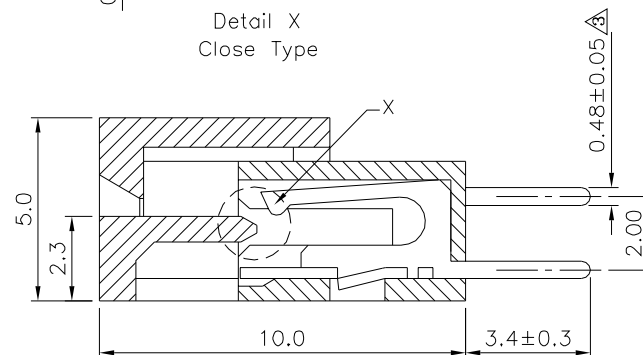
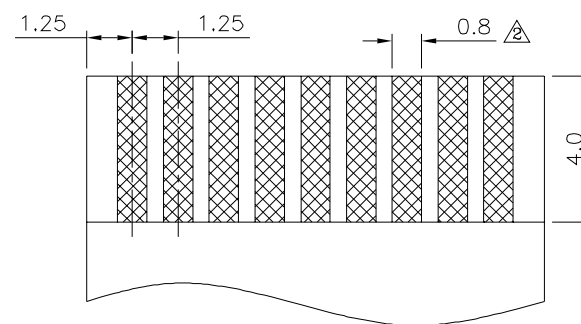
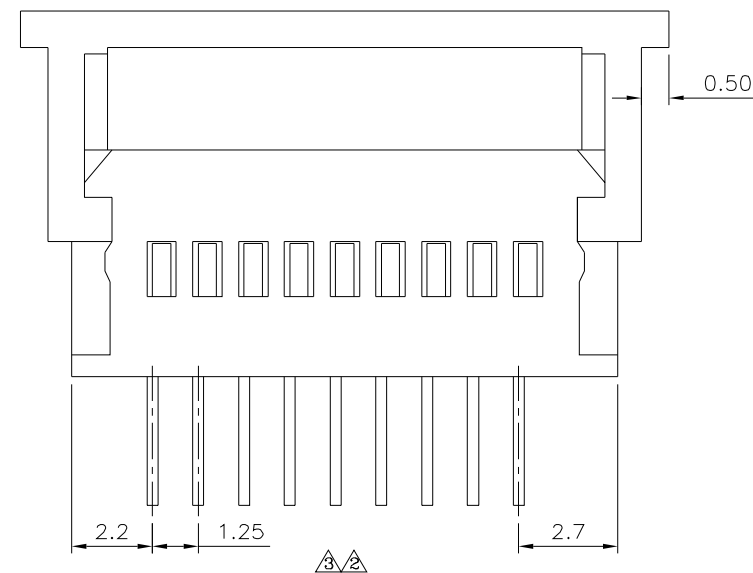


Recommended P.C.B. Layout(Component Side)

Detail X
Close Type

Open Type

FFC/FPC Dimension
Thickness:0.3±0.05mm

SPECIFICATION

1.General Characteristics:

1.25mm FPC XXP DIP 180° ZIF Single Contact
Reverse Layout White

2.Material&Finish:

Housing:PBT(UL94V-0),White
Terminal:Phosphor Bronze,Tin Plated Over Nickel

3.Electrical Characteristics:

Current Rating:1 Amp AC,DC
Voltage Rating:200V AC,DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:500 Megaohms Min.

4.Environmental Characteristics:

Ambient Temperature Range:-20°C~+85°C

5.RoHS Compliant

Pin	A	B	Pin	A	B
03	9.55	5.20	18	28.30	23.95
04	10.80	6.45	19	29.55	25.20
05	12.05	7.70	20	30.80	26.45
06	13.30	8.95	21	32.05	27.70
07	14.55	10.20	22	33.30	28.95
08	15.80	11.45	23	34.55	30.20
09	17.05	12.70	24	35.80	31.45
10	18.30	13.95	25	37.05	32.70
11	19.55	15.20	26	38.30	33.95
12	20.80	16.45	27	39.55	35.20
13	22.05	17.70	28	40.80	36.45
14	23.30	18.95	29	42.05	37.70
15	24.55	20.20	30	43.30	38.95
16	25.80	21.45	31	44.55	40.20
17	27.05	22.70	32	45.80	41.45

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 08810

08810

SCALE NONE

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

CYP

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.XX ±0.25
.XXX ±0.15
ANG. ±3°UNIT
mm

A4

Modify Data

HZF

08/08/2018

A3

Modify Data

HZF

03/25/2016

A2

Modify Data

HZF

10/08/2013

A1

Modify Data

HZF

03/26/2010

A0

NEW RELEASE

BECKY

03/02/2006

NO. REV.

REVISIONS

CHK

DATE