

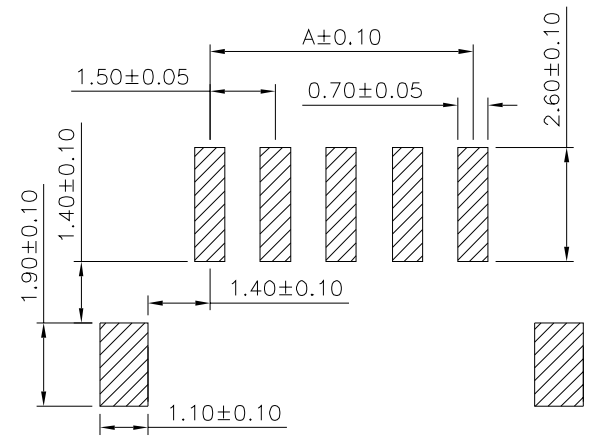
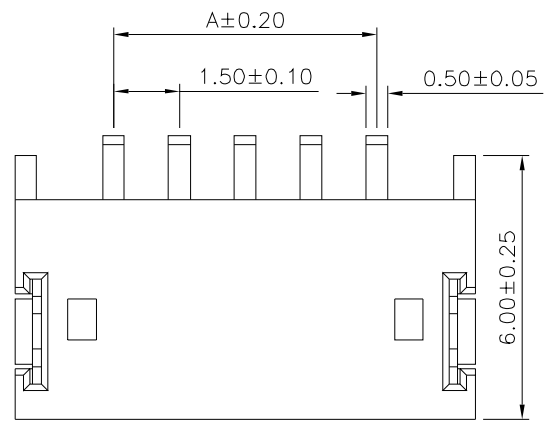


**SPECIFICATION**

Current Rating:1.0A AC/DC  
 Voltage Rating:50V AC/DC  
 Contact Resistance:40 Milliohms Max.  
 Withstanding Voltage:500V AC/Minute  
 Insulation Resistance:100 Megaohms Min.  
 Temperature Range:-25°C~+85°C  
 Insulator:PA6T(UL94V-0)  
 Pin:Brass,Tin Plated  
 Solder Tab:Brass,Tin Plated  
 RoHS Compliant

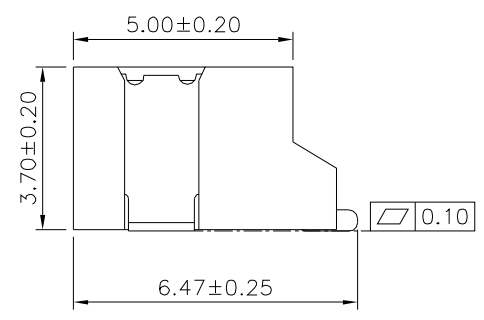

Recommended P.C.B. Layout

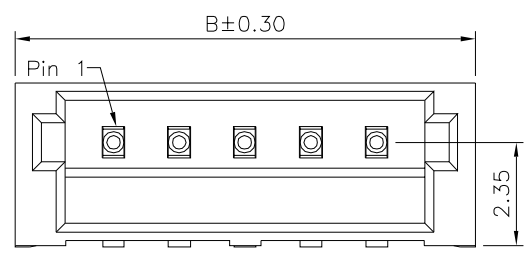

Pin	A	B
02	1.50	6.00
03	3.00	7.50
04	4.50	9.00
05	6.00	10.50
06	7.50	12.00
07	9.00	13.50
08	10.50	15.00
09	12.00	16.50
10	13.50	18.00
11	15.00	19.50
12	16.50	21.00
13	18.00	22.50
14	19.50	24.00
15	21.00	25.50

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. $\pm 0.20$ .X $\pm 0.13$ .XX $\pm 0.08$ .XXX $\pm 0.02$ ANG. $\pm 1^\circ$	
08943		MEI			
		CHECKED BY			
		HZF			
		DRAWING BY			
		CYP			
SCALE	NONE	REV.	A0	UNIT	mm

NO.	REV.	DESCRIPTION	CHK	DATE
△	A0	NEW RELEASE	HZF	12/30/2015
		REVISIONS		