
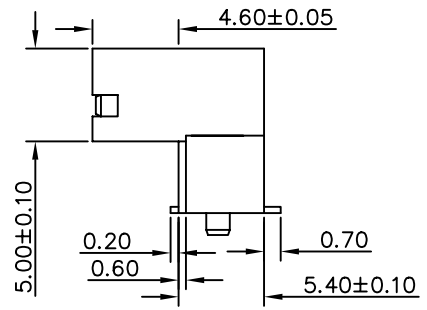
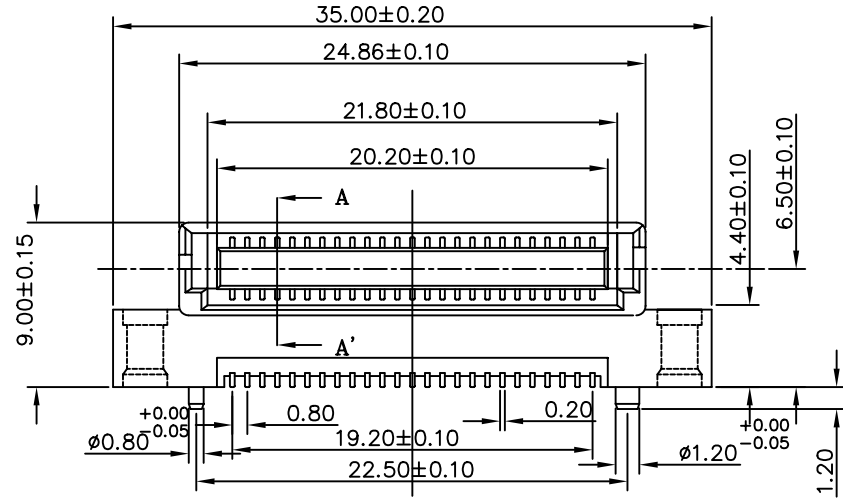
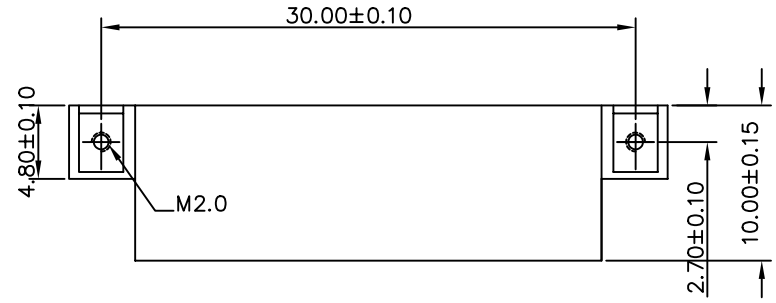


SPECIFICATION
 Current Rating:0.5A
 Voltage Rating:AC 125V
 Contact Resistance:70 Milliohms Max.
 Insulator Resistance:100Megohms Min.
 Dielectric Strength:AC 250V For 1 Minute
 Operation Temperature:-40°C To +85°C
 SMT Coplanarity:<0.10
 Suggestion:Air Reflow Tem.For SMT
 180°C ~220°C/1min. 245°C/5secs
 Housing:LCP E130i,UL 94V-0,Black
 Contact:Phosphor Bronze,Au 5u"Plating
 At Contact Area Tin Plating At Solder Tail
 t=0.2mm
 Screw(Nut):Brass,Base Plating Nickel Over All,

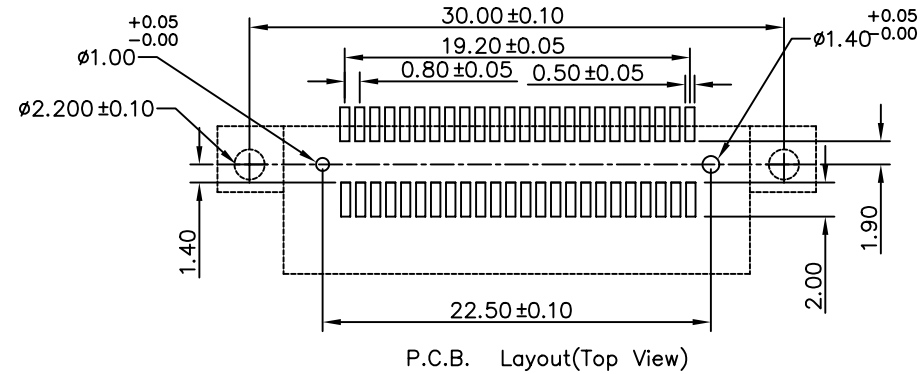

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 09029

APPROVED BY MEI
 CHECKED BY RAN
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10

SCALE NONE

REV. A

UNIT mm

AREA REVISIONS CHK DATE