


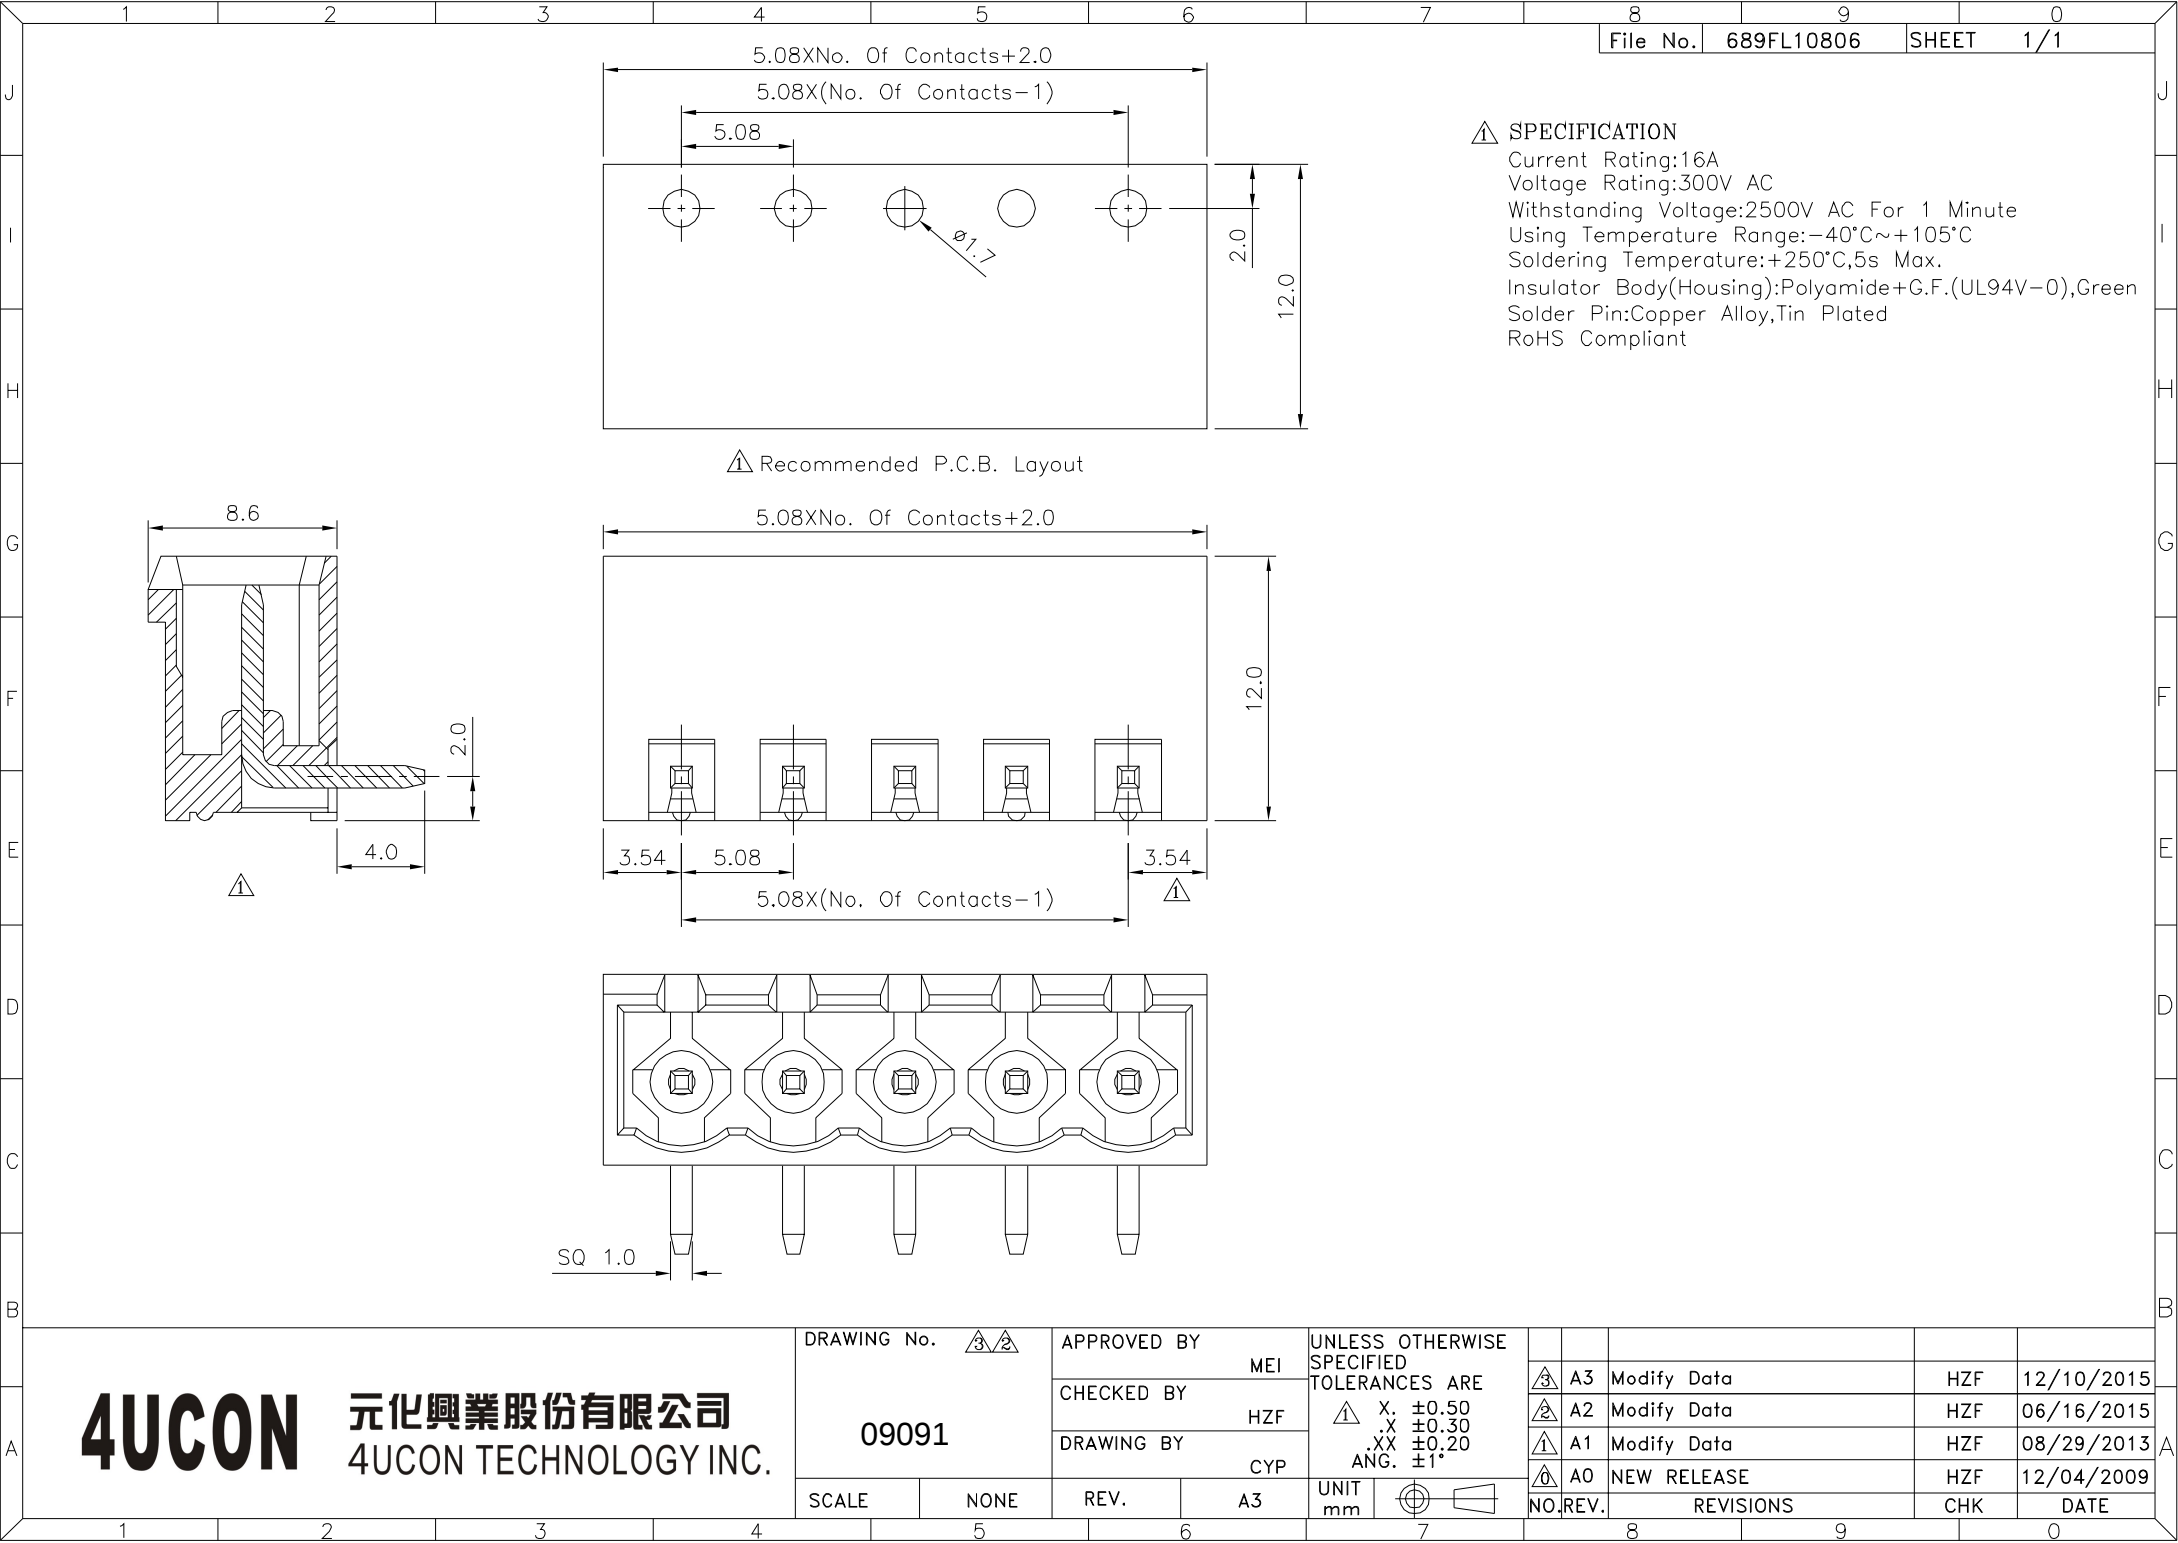

△ SPECIFICATION
Current Rating:16A
Voltage Rating:300V AC
Withstanding Voltage:2500V AC For 1 Minute
Using Temperature Range:-40°C~+105°C
Soldering Temperature:+250°C,5s Max.
Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △△		APPROVED BY	
09091		MEI	
		CHECKED BY	
		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
△	X.	±0.50			
△	.X	±0.30			
△	.XX	±0.20			
△	ANG.	±1°			
△	A3	Modify Data		HZF	12/10/2015
△	A2	Modify Data		HZF	06/16/2015
△	A1	Modify Data		HZF	08/29/2013
△	A0	NEW RELEASE		HZF	12/04/2009
NO.	REV.	REVISIONS	CHK	DATE	