
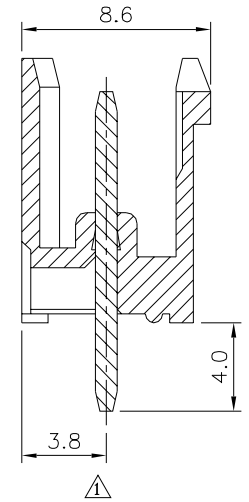
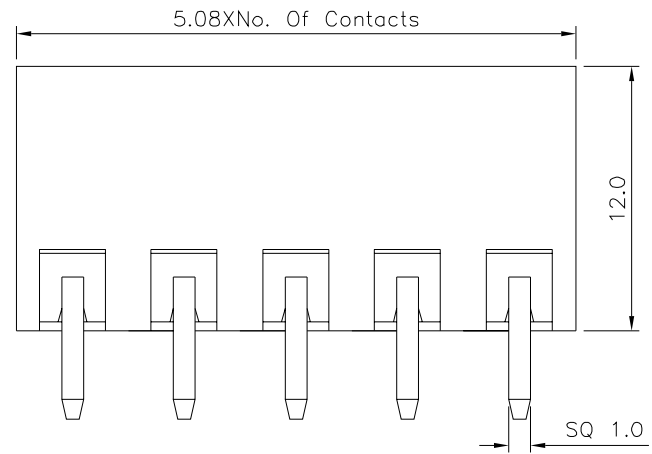


Recommended P.C.B. Layout

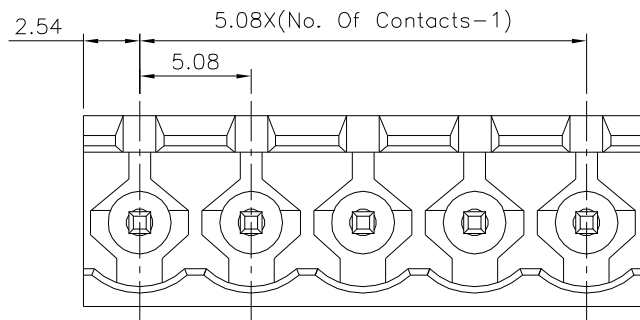

△ SPECIFICATION
 Current Rating:16A
 Voltage Rating:300V AC
 Withstanding Voltage:2500V AC 1 Minute
 Using Temperature Range:-40°C~+105°C
 Soldering Temperature:+250°C,5s Max.
 Solder Pin:Copper Alloy,Tin Plated
**△ Insulator Body(Housing):Polyamide+G.F(UL94V-0),Green
 RoHS Compliant**

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. **09112**

APPROVED BY EMILY
 CHECKED BY HZF
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.50
 .X ±0.30
 .XX ±0.20
 ANG. ±1°

SCALE NONE

REV. A3

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	11/02/2022
2	A2	Modify Data	HZF	09/24/2015
1	A1	Modify Data	HZF	06/07/2013
0	A0	NEW RELEASE	HZF	02/02/2010