
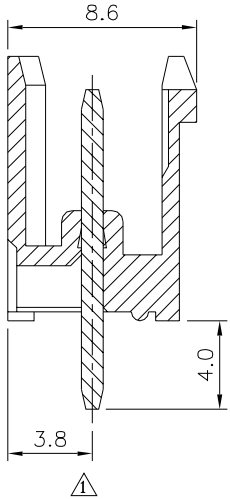
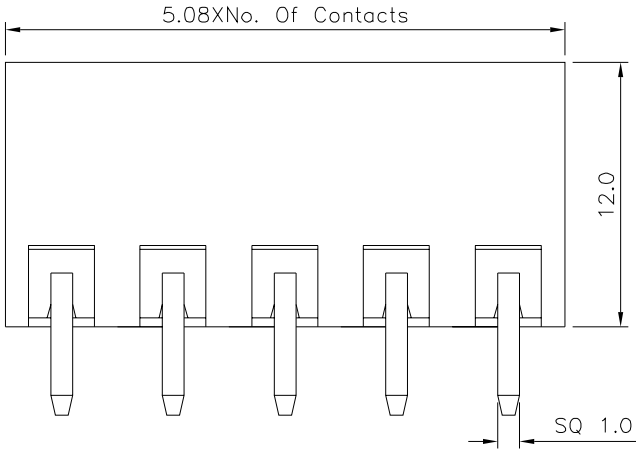


Recommended P.C.B. Layout

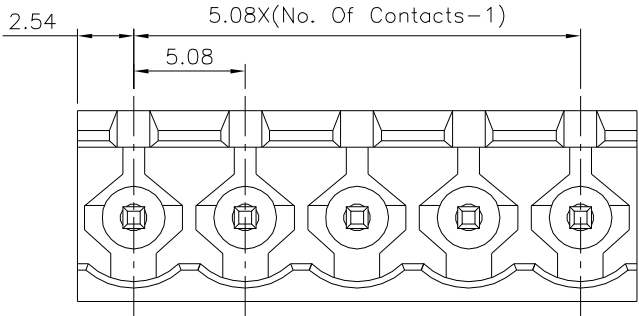

- ⚠

SPECIFICATION

Current Rating:16A

Voltage Rating:300V AC

Withstanding Voltage:2500V AC 1 Minute

Using Temperature Range:−40°C~+105°C

Soldering Temperature:+250°C,5s Max.

Solder Pin:Copper Alloy,Tin Plated
- ⚠

Insulator Body(Housing):Polyamide+G.F(UL94V−0),Green

RoHS Compliant

4U CON 元化興業股份有限公司

4U CON TECHNOLOGY INC.

DRAWING No. 09119

APPROVED BY EMILY

CHECKED BY HZF

DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

X. ±0.50

.X ±0.30

.XX ±0.20

ANG. ±1°

⚠	A3	Modify Data	HZF	11/02/2022
⚠	A2	Modify Data	HZF	09/24/2015
⚠	A1	Modify Data	HZF	06/07/2013
⚠	A0	NEW RELEASE	HZF	02/02/2010
NO.	REV.	REVISIONS	CHK	DATE

1234567890

SCALE NONE REV. A3 UNIT mm

6

7

8

9

0