
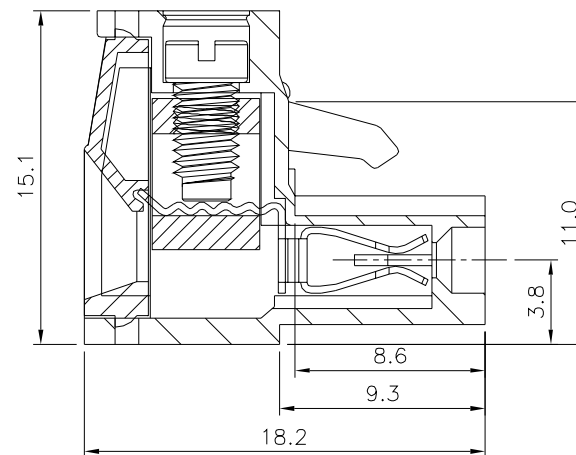
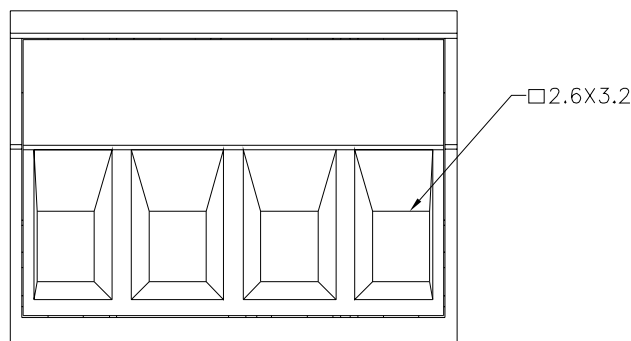


SPECIFICATION

Current Rating:16A/Way Max.
Voltage Rating:300V AC
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:2500V AC/Minute
Operation Temperature:-40°C~+105°C
Wire Range:12~26 AWG
Torque:5.0 Kgf.cm/M3
Insulator Body:Polyamide(UL94V-0),Green
Contact:Copper Alloy,Nickel Plated
Wire Guard:Copper Alloy,Tin Plated
Screw:Steel,Galvanized With Cr3+ Plated
RoHS Compliant

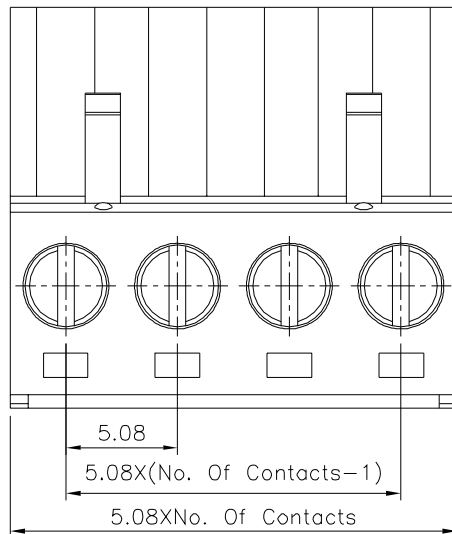

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

09167

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee

REV.

B0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ± 0.50
.X ± 0.30
.XX ± 0.20
ANG. $\pm 1^\circ$

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

B0

NEW RELEASE

HZF

07/25/2024