

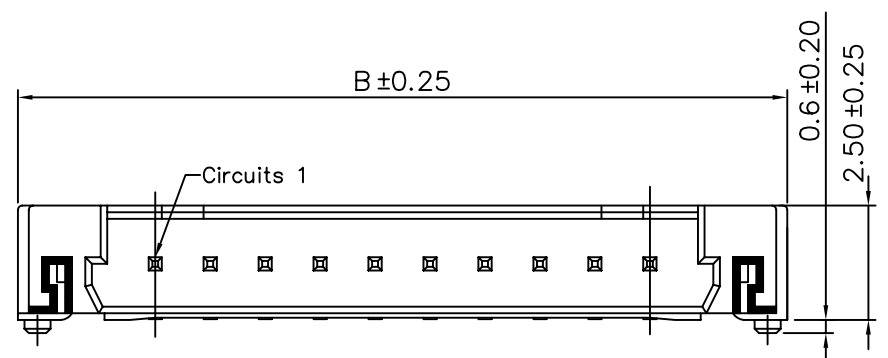
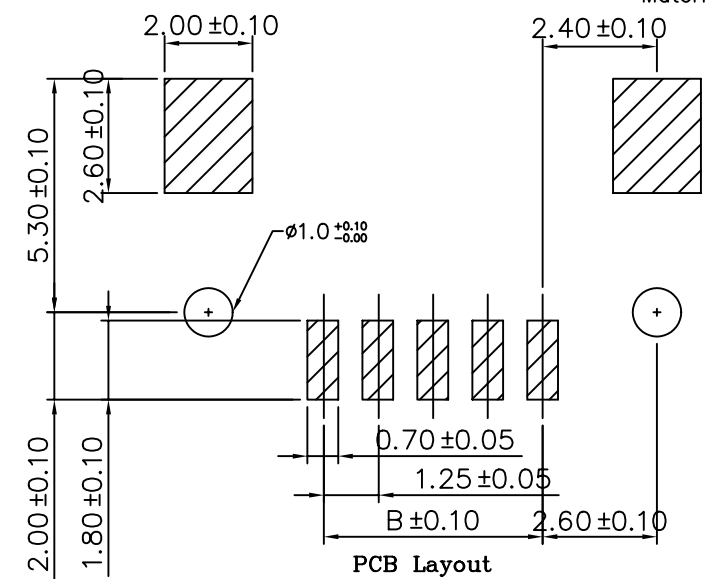


**SPECIFICATIONS**  
 Current Rating : 1A AC DC  
 Voltage Rating : 100V AC DC  
 Temperature Range : -25°C To +85°C  
 Contact Resistance : 20milliOhms Max.  
 Insulator Resistance : 500MegOhms Min.  
 Withstanding Voltage : 500V AC/Minute  
 Pin Material : Brass/Tin-Plated  
 Solder Tab : Brass/Tin-Plated  
 Material : Nylon 6T,UL 94V-0

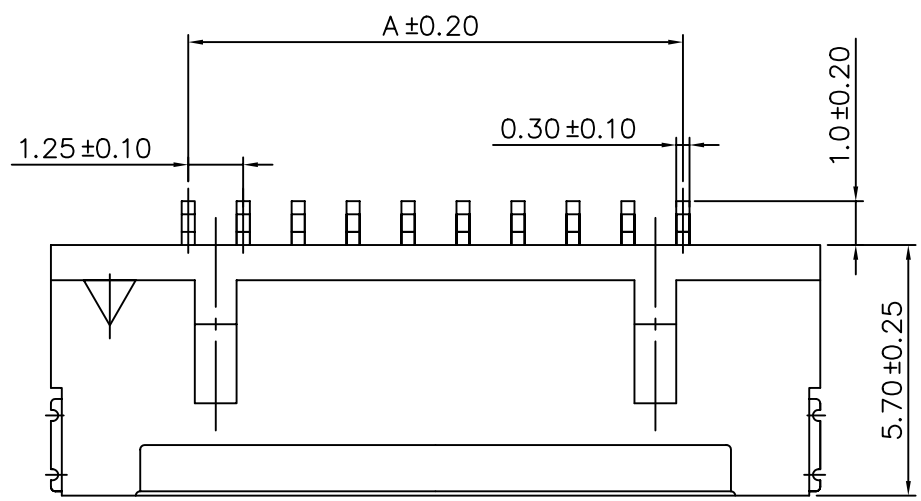

Circuit	Dimension	
	A	B
2	1.25	7.45
3	2.50	8.70
4	3.75	9.95
5	5.00	11.20
6	6.25	12.45
7	7.50	13.70
8	8.75	14.95
9	10.00	16.20
10	11.25	17.45
11	12.50	18.70
12	13.75	19.95
13	15.00	21.20
14	16.25	22.45
15	17.50	23.70
20	23.75	29.95
25	30.00	36.20
30	36.25	42.45

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 09221

APPROVED BY MEI  
 CHECKED BY RAN  
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG.

SCALE NONE

REV. A

UNIT mm

AREA REVISIONS CHK DATE