
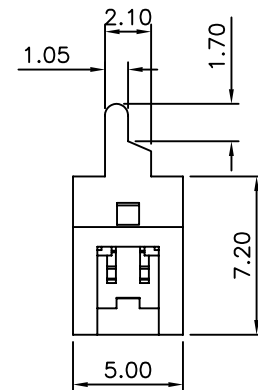
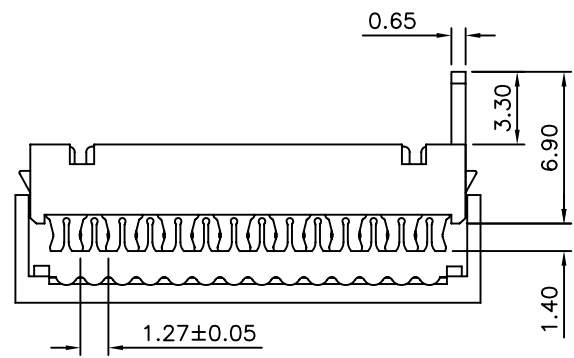
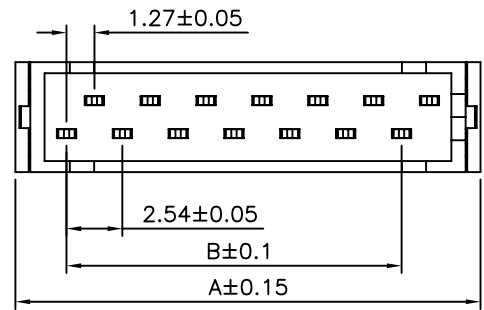


**SPECIFICATIONS**  
 Current Rating:1.0A AC,DC  
 Voltage Rating:30V AC,DC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megohms Min.  
 Withstanding Voltage:AC 500V AC/Minute  
 Operating Temperature:-40°C ~ +105°C  
 Insulator:High Temp. Plastic UL94V-0  
 Contact:Phosphor Bronze  
 Finish:Tin Plated

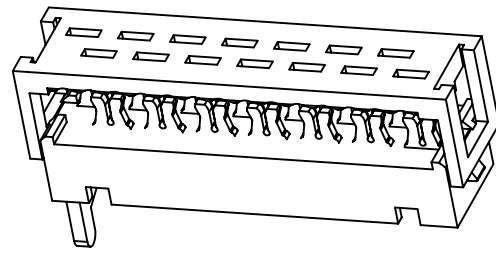

Circuit	Dim. A	Dim. B
04	8.45	2.54
06	10.99	5.08
08	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.2 .XX ±0.15 ANG.					
09226		MEI							
		CHECKED BY							
		BECKY							
		DRAWING BY							
		HZF							
SCALE	NONE	REV.	A0	UNIT	mm	△ A0	NEW RELEASE	BECKY	02/15/2005
						NO.REV.	REVISIONS	CHK	DATE