

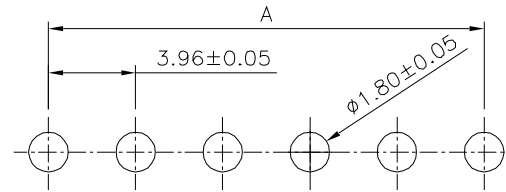
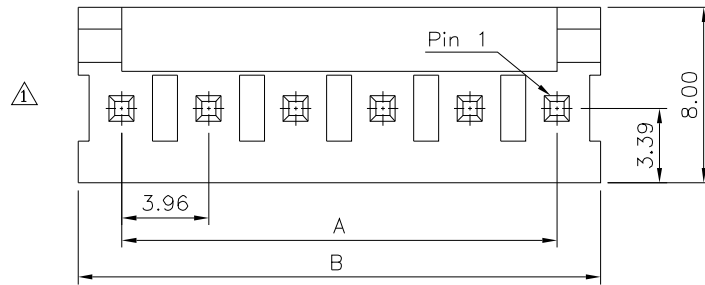
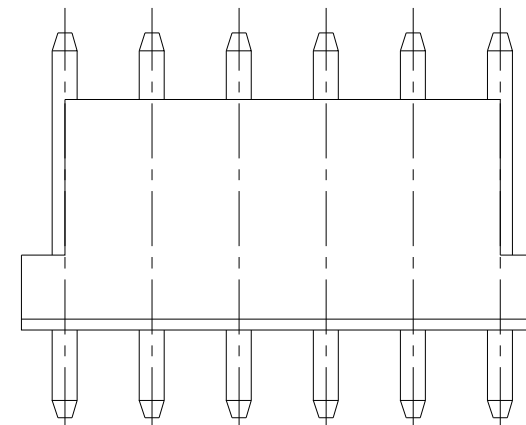


△₃△₁ SPECIFICATION

Electrical Rating:UL 250V 4A,AC/DC
CSA 125V 5A,AC/DC
Insulator:PA66 UL94V-2,White
Contact:Brass,Tin Plated Over Nickel
RoHS Compliant

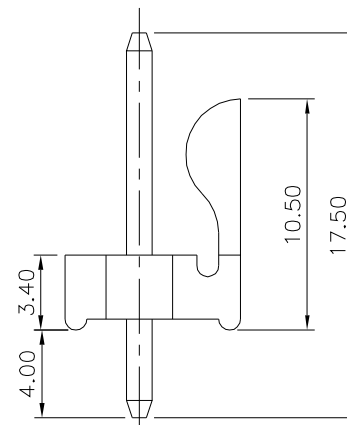


① Recommended P.C.B. Layout

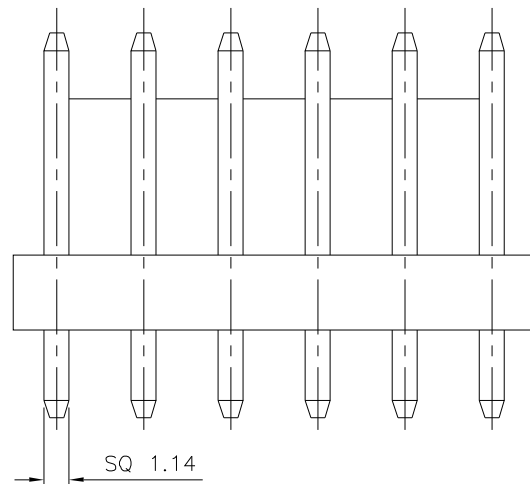

0 0 0 0 &B)	△	Circuits	A	B
	2	3.96	7.92	
	3	7.92	11.88	
	4	11.88	15.84	
	5	15.84	19.80	
	6	19.80	23.76	
	7	23.76	27.72	
	8	27.72	31.68	
	9	31.68	35.64	
	10	35.64	39.60	
	11	39.60	43.56	
	12	43.56	47.52	
	13	47.52	51.48	
	14	51.48	55.44	
	15	55.44	59.40	
	16	59.40	63.36	
	17	63.36	67.32	
	18	67.32	71.28	
	19	71.28	75.24	
	20	75.24	79.20	
	21	79.20	83.16	
	22	83.16	87.12	
	23	87.12	91.08	
	24	91.08	95.04	
	25	95.04	99.00	
	26	99.00	102.96	
	27	102.96	106.92	
	28	106.92	110.88	

Pin	UL94V-2	UL94V-0
	Tolerances(A&B)	Tolerances(A&B)
2-10P	+0.20/-0.10	+0.30/-0.10
11-15P	+0.30/-0.10	+0.40/-0.10
16-20P	+0.40/-0.10	+0.50/-0.10
21-28P	+0.50/-0.10	+0.60/-0.10

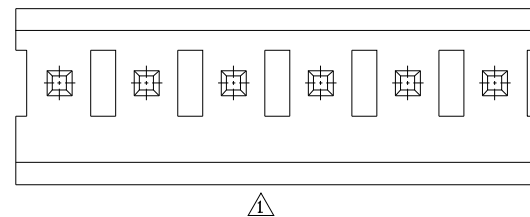

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No. 3

09530

SCALE	NONE
-------	------

NONE	REV.
------	------

APPROVED BY	
-------------	--


CHECKED BY

DRAWING BY

UNLESS OTHERWISE SPECIFIED

SPECIFIED TOLERANCES ARE	
$\triangle 1$	.X ± 0.30
	.XX ± 0.20
	.XXX ± 0.10
	ANG. $\pm 2^\circ$

UNIT	mm
------	----



3	B3

3	Modify Data
---	-------------

2	B2

2	Modify Data
---	-------------

1	B1

1	Modify Data
---	-------------

[illegible]

NEW RELEASES

NO.	REV.
-----	------

V.	REVI
----	------

CHK	DATE
-----	------

DATE _____