

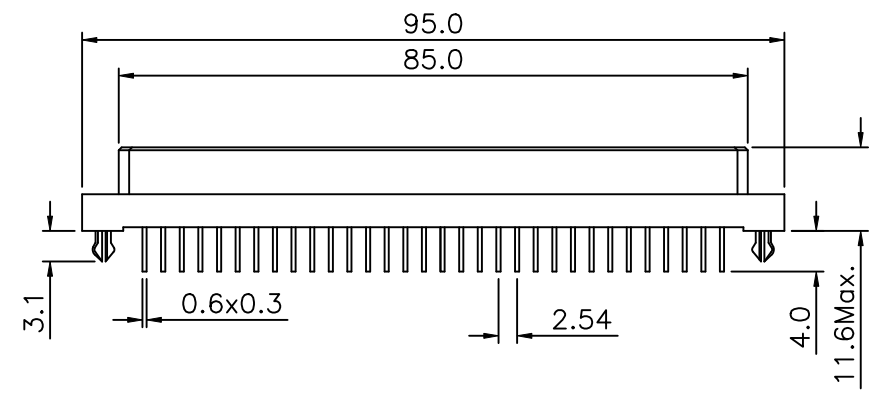
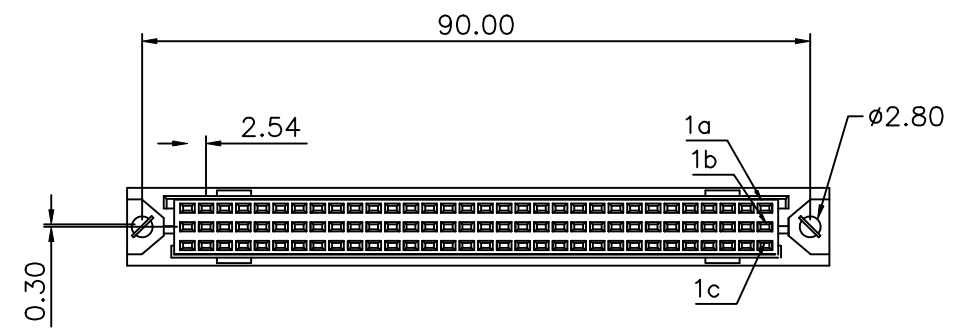


SPECIFICATIONS

Rating current: 3 AMP Max.
 Operation Voltage: 250V AC Max.
 Contact resistance: 20 Milliohm max.
 Insulation resistance: 3000 Megohm Min @500VDC
 Withstanding voltage: 1000VAC/minute
 Operating temperature: -55°C to +105°C
 Insulator: PBT & Glass Filled, UL 94V-0
 Contact: Phosphor Bronze
 Underplate: 50u" Nickel
 Contact Area: 1u"~30u" Selective Gold
 Solder Tails Area: 100u" Tin/Lead

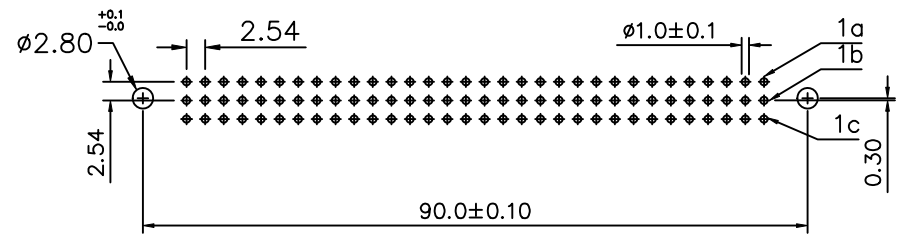

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
09682		MEI		
		BECKY		
		DRAWING BY		.X ±0.30
		HZF		.XX ±0.20
				.ANG ±5°
SCALE	NONE	REV.	A0	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE		