
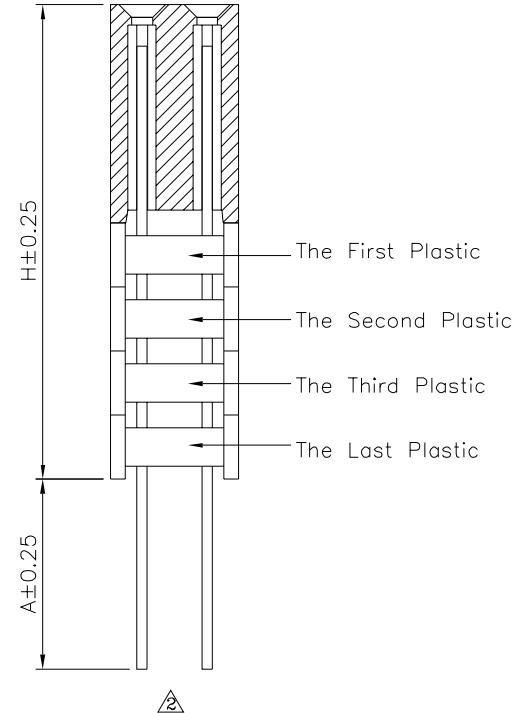
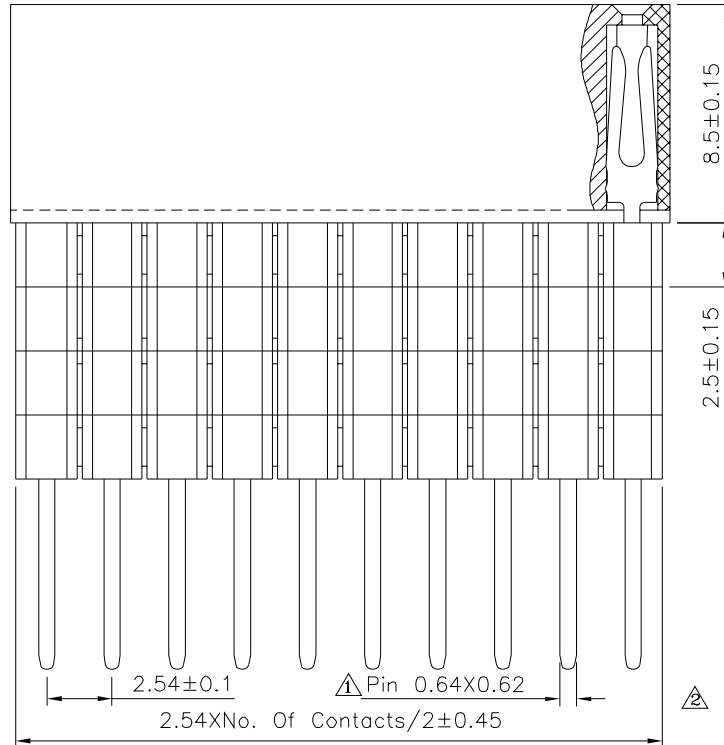


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

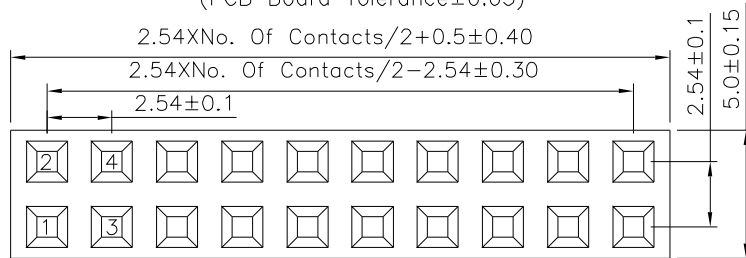

SPECIFICATION

Current Rating:3A

- Withstand Voltage:1000V AC Min./Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operating Temperature:-40°C~+105°C

- Insulator:PA9T(UL94V-O),Black
- Contact:Brass,Gold Flash Over Nickel
- RoHS Compliant

Series no.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

09688

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

REV.



A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ± 0.30 X. $\pm 2^\circ$
.XX ± 0.25 .X. $\pm 1.5^\circ$
.XXX ± 0.20 .XXX $\pm 1.0^\circ$
.XXX ± 0.15 .XXX $\pm 0.5^\circ$

UNIT

mm



NO.

REV.

A2

A1

A0

REVISIONS

CHK

DATE

Modify Data

Modify Data

NEW RELEASE

Modify Data

Modify Data

Modify Data

Modify Data

Modify Data

Modify Data

HZF

HZF

HZF

HZF

HZF

HZF

HZF

HZF

HZF

01/26/2024

12/20/2023

05/03/2014

05/03/2014

05/03/2014

05/03/2014

05/03/2014

05/03/2014

05/03/2014