
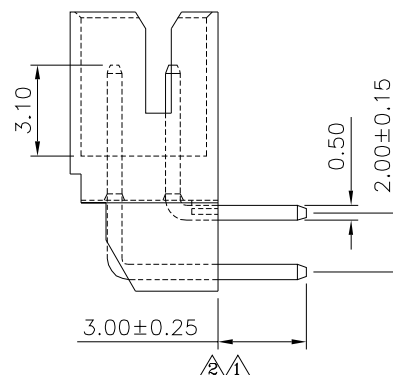
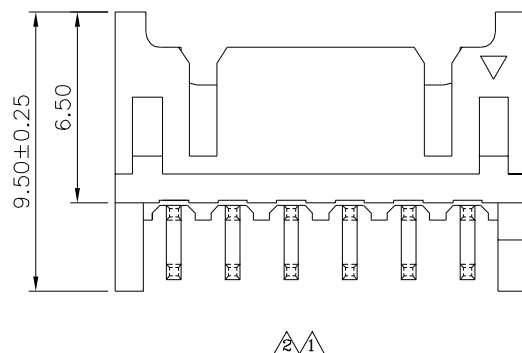


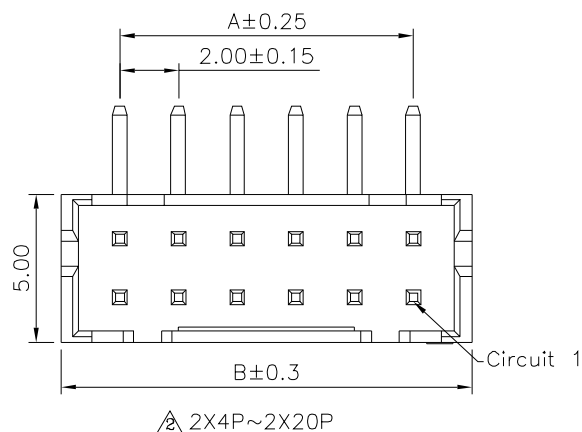


SPECIFICATION

Current Rating:3A AC/DC
Voltage Rating:250V AC/DC
Withstand Voltage:800V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-25°C~+85°C
Insulator:PA66(UL94V-0),Grey
Contact:Brass,Tin Plated
RoHS Compliant

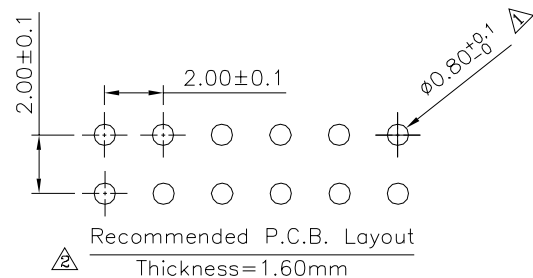

Pin	A	B
04	2.00	6.00
06	4.00	8.00
08	6.00	10.00
10	8.00	12.00
12	10.00	14.00
14	12.00	16.00
16	14.00	18.00
18	16.00	20.00
20	18.00	22.00
22	20.00	24.00
24	22.00	26.00
26	24.00	28.00
28	26.00	30.00
30	28.00	32.00
32	30.00	34.00
34	32.00	36.00
36	34.00	38.00
38	36.00	40.00
40	38.00	42.00

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

09731

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


.X ±0.30 X*. ±1*

.XX ±0.20

.XXX ±0.10

UNIT

mm



NO.

REV.

REVISIONS

CHK

DATE

3

A3

2

A2

1

A1

0

A0

Modify Data

Modify Data

Modify Data

NEW RELEASE

REVISIONS

CHK

DATE

DATE

Modify Data

Modify Data

Modify Data

NEW RELEASE

REVISIONS

CHK

DATE

DATE

Modify Data

Modify Data

Modify Data

NEW RELEASE

REVISIONS

CHK

DATE

DATE

Modify Data

Modify Data

Modify Data

NEW RELEASE

REVISIONS

CHK

DATE

DATE