
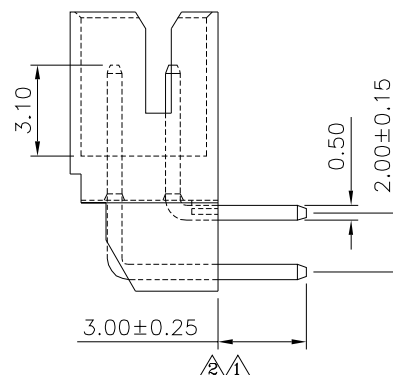


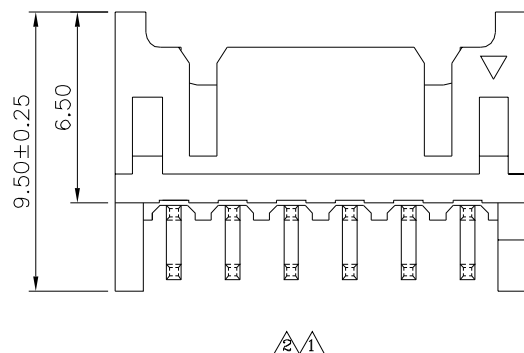
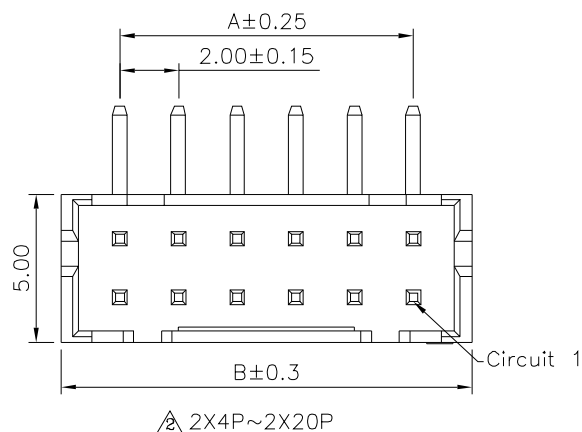


SPECIFICATION

Current Rating:3A AC/DC
Voltage Rating:250V AC/DC
Withstand Voltage:800V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-25°C~+85°C
Insulator:PA66(UL94V-0),Grey
Contact:Brass,Tin Plated
RoHS Compliant

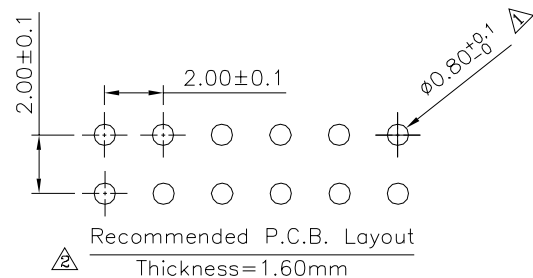

Pin	A	B
04	2.00	6.00
06	4.00	8.00
08	6.00	10.00
10	8.00	12.00
12	10.00	14.00
14	12.00	16.00
16	14.00	18.00
18	16.00	20.00
20	18.00	22.00
22	20.00	24.00
24	22.00	26.00
26	24.00	28.00
28	26.00	30.00
30	28.00	32.00
32	30.00	34.00
34	32.00	36.00
36	34.00	38.00
38	36.00	40.00
40	38.00	42.00

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

09733

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE

NONE

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.30 X*. ±1*

.XX ±0.20

.XXX ±0.10

UNIT

mm



NO.

REV.

A3

A2

A1

A0

Modify Data

Modify Data

Modify Data

NEW RELEASE

REVISIONS

CHK

DATE

HZF

HZF

HZF

HZF

11/11/2021

03/02/2020

01/18/2019

09/26/2014