
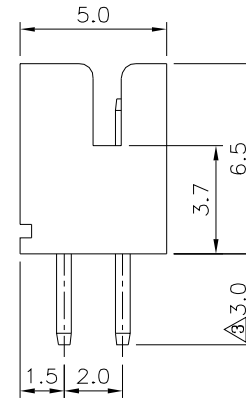
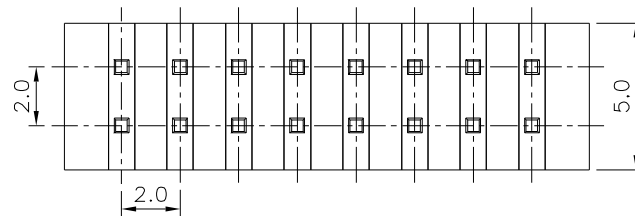
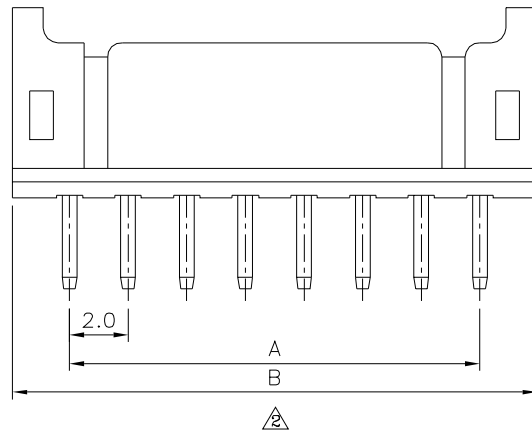


Recommended P.C.B. Layout

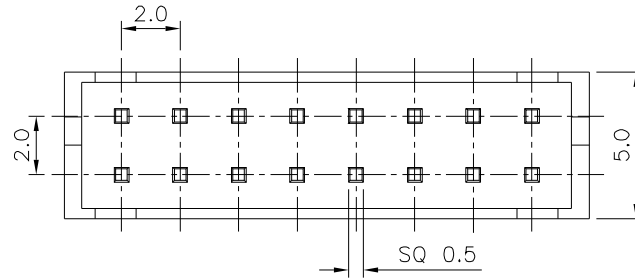

SPECIFICATION

Current Rating:2A AC/DC

Voltage Rating:250V AC/DC

Operation Temperature:-25°C~+85°C

Contact Resistance:20 Milliohms Max.

Insulation Resistance:1000 Megaohms Min.

Terminal:Brass,Tin Plated

Insulator:PA66+G.F.(UL94V-0)

RoHS Compliant

Pos.	A	B
4	2.0	6.0
6	4.0	8.0
8	6.0	10.0
10	8.0	12.0
12	10.0	14.0
14	12.0	16.0
16	14.0	18.0
18	16.0	20.0
20	18.0	22.0
22	20.0	24.0
24	22.0	26.0
26	24.0	28.0
28	26.0	30.0
30	28.0	32.0
32	30.0	34.0
34	32.0	36.0
40	38.0	42.0

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

09740

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


.X ± 0.35

.XX ± 0.25

ANG.

UNIT

mm



A3

Modify Data

HZF

03/28/2015

A2

Modify Data

HZF

06/18/2010

A1

Modify Data

INGRID

03/28/2008

A0

NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE