


**△ SPECIFICATION**  
 Current Range:  
 Non-Switching: 100mA 50V DC  
 Switching: 25mA 24V DC  
 Withstanding Voltage: 500V AC 50Hz Or 60Hz For 1 Minute  
 Contact Resistance: 50 Milliohms Max. (Initial)  
 Insulation Resistance: 100 Megaohms Min. At 500V DC, 60s ± 5s  
**△ Operation Temperature Range: -40°C ~ +85°C**  
**Storage Temperature Range: -40°C ~ +85°C**  
 Operation Force: 9.8N Max.  
 RoHS Compliant

Pin	A	B
02	6.44	2.54
03	8.98	5.08
04	11.52	7.62
05	14.06	10.16
06	16.60	12.70
07	19.14	15.24
08	21.68	17.78
09	24.22	20.32
10	26.76	22.86
12	31.84	27.94

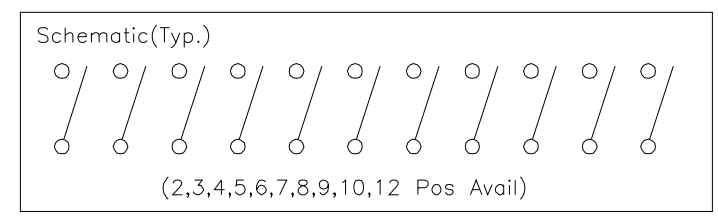

Item	Description	Q'ty	Material	Remark
①	Terminal	1	Brass	Gold Plated Over Nickel
②	Cover	1	PBT, UL94V-0	Red
③	Stem	2~12	PBT, UL94V-0	White
④	Contact	2~12	C7035	Gold Plated Over Nickel
⑤	Base	1	PA66+20%G.F.	Black

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. **09811**

APPROVED BY: MEI  
 CHECKED BY: HZF  
 DRAWING BY: CYP

SCALE: NONE REV. B3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:  
 10mm Over ±0.20  
 10mm Below ±0.10

UNIT: mm

NO.	REV.	REVISIONS	CHK	DATE
△ B3		Modify Data	HZF	07/13/2018
△ B2		Modify Data	HZF	08/11/2015
△ B1		Modify Data	HZF	04/04/2014
△ B0		Modify Data	HZF	03/14/2009
△ B0		NEW RELEASE	HZF	03/14/2009