

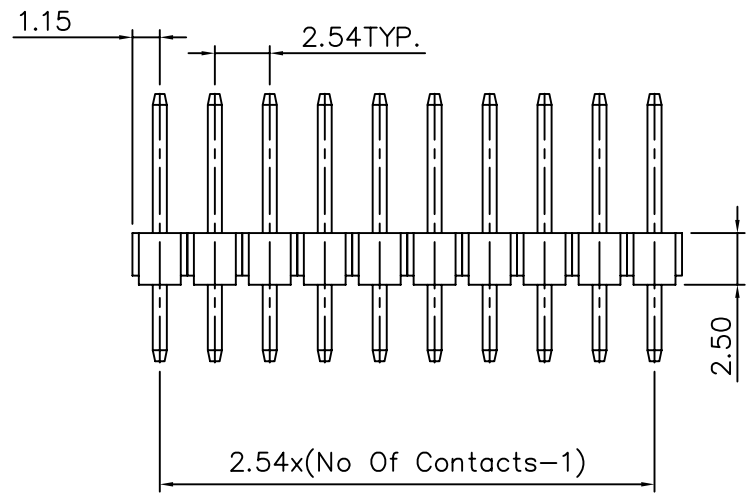


SPECIFICATIONS
Current Rate : 1AMP
Insulation Resistance : 5000Megohms Min.
At DC 500V
Contact Resistance : 20 Milliohms Max.
At DC 100mA
Operation Temperature : -55°C To +105°C
Insulator :30% Glass Filled PBT UL 94V-0
Contact : Brass,Gold Flash

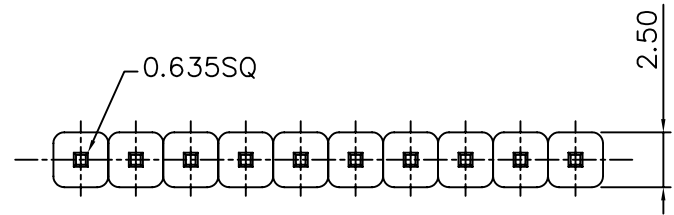

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 09820		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 .XXX	
		CHECKED BY BECKY			
		DRAWING BY HZF			
SCALE	NONE	REV.	A0	UNIT mm	

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	MEI	