




**SPECIFICATION**  
 Current Rating:1A AC/DC  
 Voltage Rating:50V AC/DC  
 Withstanding Voltage:500V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:500 Megaohms Min.  
 Temperature Range:-25°C~+85°C  
 Pin:Phosphor Bronze,Tin Plated  
 Insulator:PA6T(UL94V-0)  
 Shell:Phosphor Bronze,Tin Plated  
 RoHS Compliant

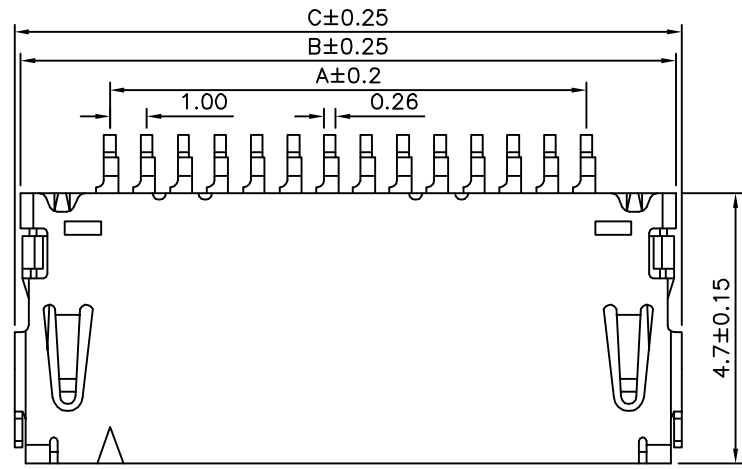






Pin	A	B	C
8	7.0	11.55	11.95
14	13.0	17.55	17.95
20	19.0	23.55	23.95
30	29.0	33.55	33.95

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.15 .XX ±0.05 ANG. ±1°
09880		EMILY		
		HZF		
		DRAWING BY		UNIT mm
		SONG		
SCALE	NONE	REV.	A4	

NO.	REV.	REVISIONS	CHK	DATE
△A4		Modify Data	HZF	11/06/2013
△A3		Modify Spec.	HZF	03/17/2011
△A2		Add Dim	HZF	08/03/2009
△A1		Modify Data	HZF	08/01/2009
△A0		NEW RELEASE	HZF	09/06/2007

**SPECIFICATION**  
 10 Sprocket Hole Pitch Cumulative Tolerance  $\pm 0.20$   
 Carrier Camber Is With In 1mm In 250mm  
 Material:Black Conductive Polystyrene Alloy  
 All Dimensions Meet EIA-481-B Requirements  
 Packing Length Per 22" Reel:92.5 Meters  
 Component Load Per 13" Reel:2500 PCS  
 RoHS Compliant

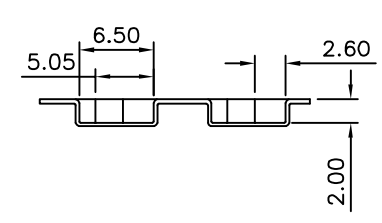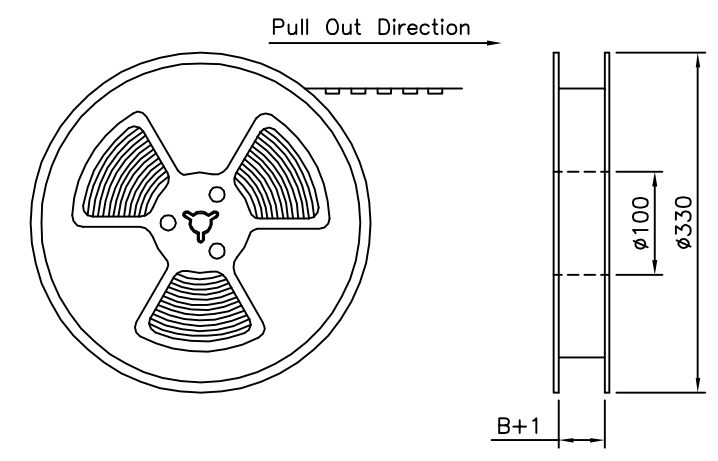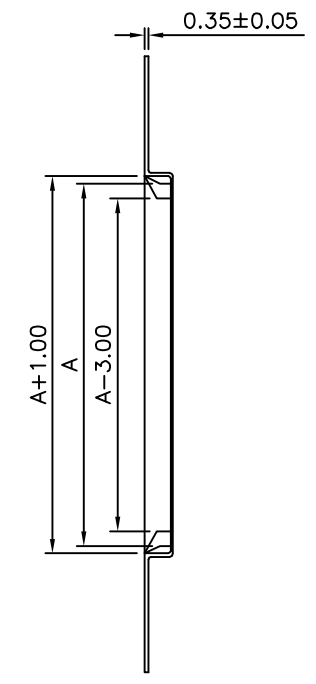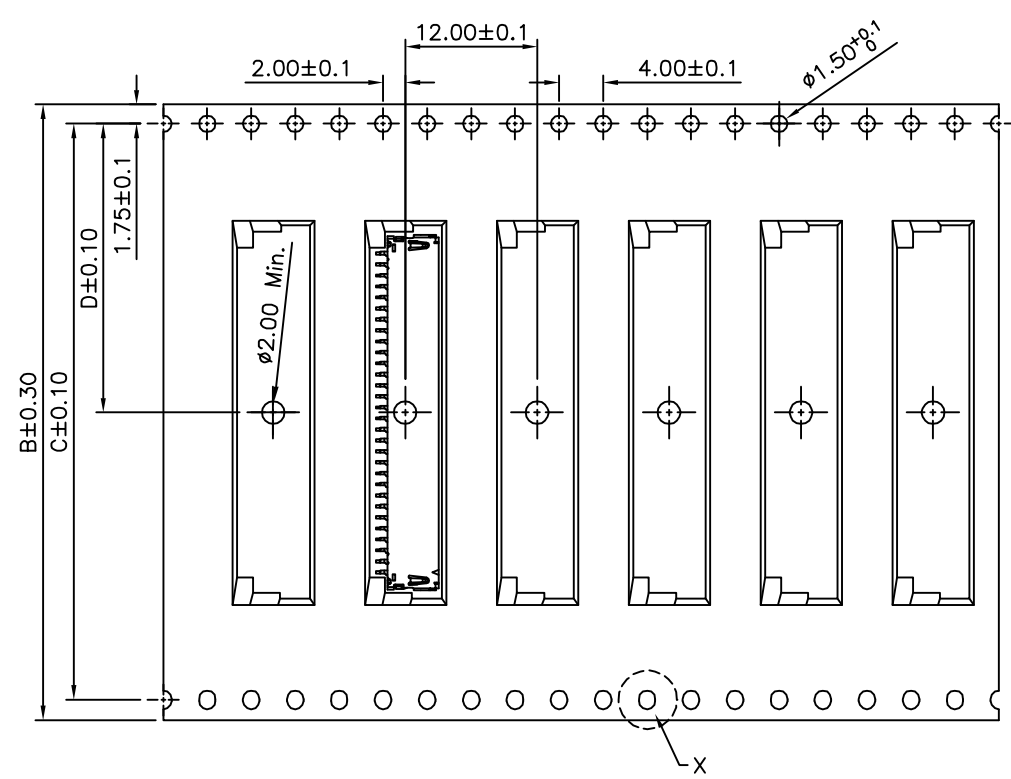

Pin	A	B	C	D
14	17.95	32.00	28.40	14.20
20	23.95	44.00	40.40	20.20
30	33.95	56.00	52.40	26.20

The Mark Of 8P Aren't Packing Tooled Already

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X $\pm 0.38$ .XX $\pm 0.25$ ANG.
09880		EMILY		
		HZF		
		DRAWING BY		UNIT mm
		SONG		
SCALE	NONE	REV.	A4	

NO.	REV.	REVISIONS	CHK	DATE
A4		Modify Data	HZF	11/06/2013
A3		Modify Spec.	HZF	03/17/2011
A2		Add Dim	HZF	08/03/2009
A1		Modify Data	HZF	08/01/2009
A0		NEW RELEASE	HZF	09/06/2007