


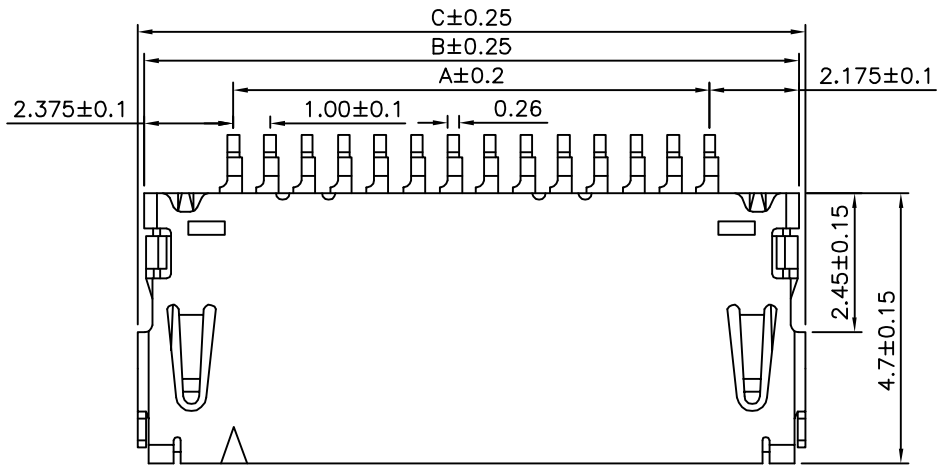


SPECIFICATION
 Current Rating:1A AC/DC
 Voltage Rating:50V AC/DC
 Withstanding Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:500 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Pin:Phosphor Bronze,Tin Plated
 Insulator:PA6T(UL94V-0)
 Shell:Phosphor Bronze,Tin Plated
 RoHS Compliant

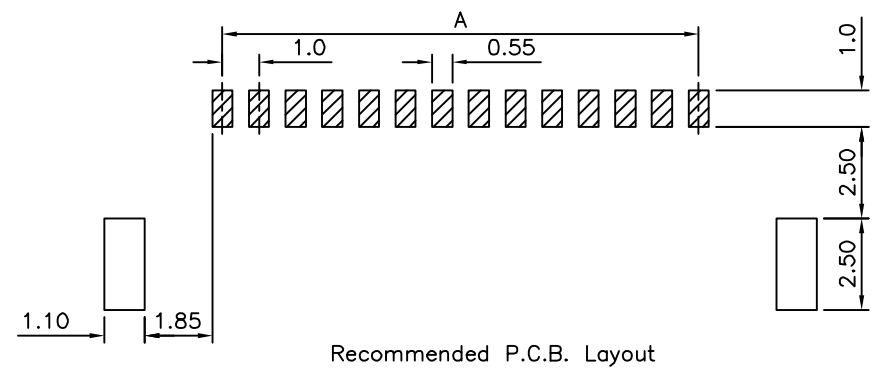

Pin	A	B	C
8	7.0	11.55	11.95
14	13.0	17.55	17.95
20	19.0	23.55	23.95
30	29.0	33.55	33.95

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.15 .XX ±0.05 ANG. ±1°
09881		EMILY		
		HZF		
		DRAWING BY		UNIT mm
		HAO		
SCALE	NONE	REV.	B0	

NO.	REV.	REVISIONS	CHK	DATE
△ B0		NEW RELEASE	HZF	07/21/2015