


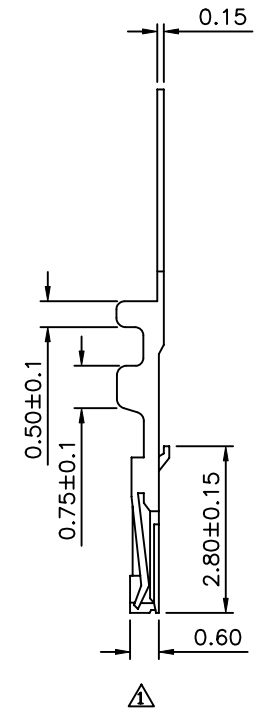


△ SPECIFICATION
 Current Rating:1A AC/DC
 Voltage Rating:50V AC/DC
 Temperature Range:-25°C~+85°C
 Insulation Resistance:500 Megaohms Min.
 Contact Resistance:20 Milliohms Max.
 Withstanding Voltage:500V AC/Minute
 Wire Range:AWG#28~#32
 Insulation O.D.:0.6mm(Max.)
 Material:Phosphor Bronze,Gold Plated
 Q'ty:15K/Reel
 RoHS Compliant

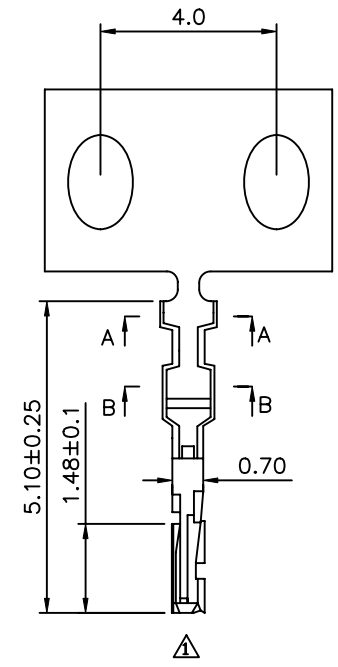

△ Section A-A



△ Section B-B

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.15 .XX ±0.05 ANG. ±1°
09882		EMILY		
		CHECKED BY HZF		
		DRAWING BY WSS		
SCALE	NONE	REV.	A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	03/21/2011
△ A0		NEW RELEASE	HZF	07/04/2007