
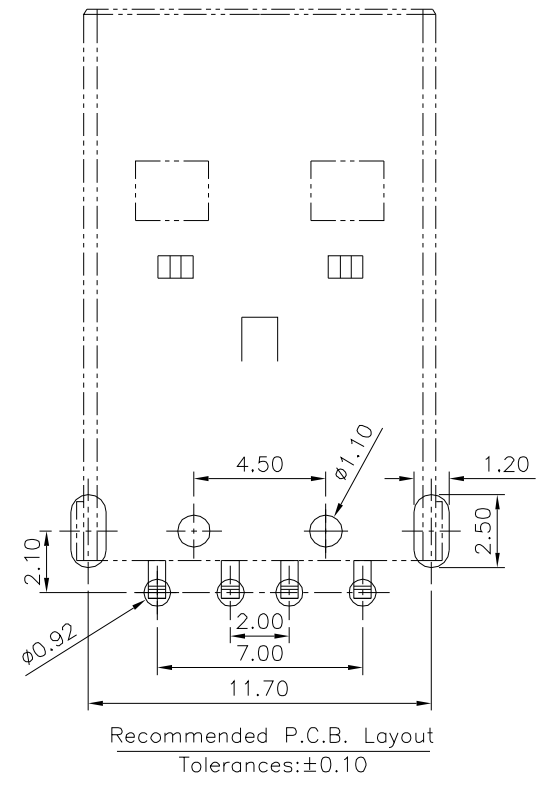


**△ SPECIFICATION**

Current Rating: 1 Amp Max.  
 Dielectric Withstanding Voltage: 30V AC For 1 Minute  
 Insulation Resistance: 1000 Megaohms Min. At DC 500V  
 Contact Resistance: 30 Milliohms Max.  
 Temperature Range: -55°C~+105°C  
 RoHS Compliant

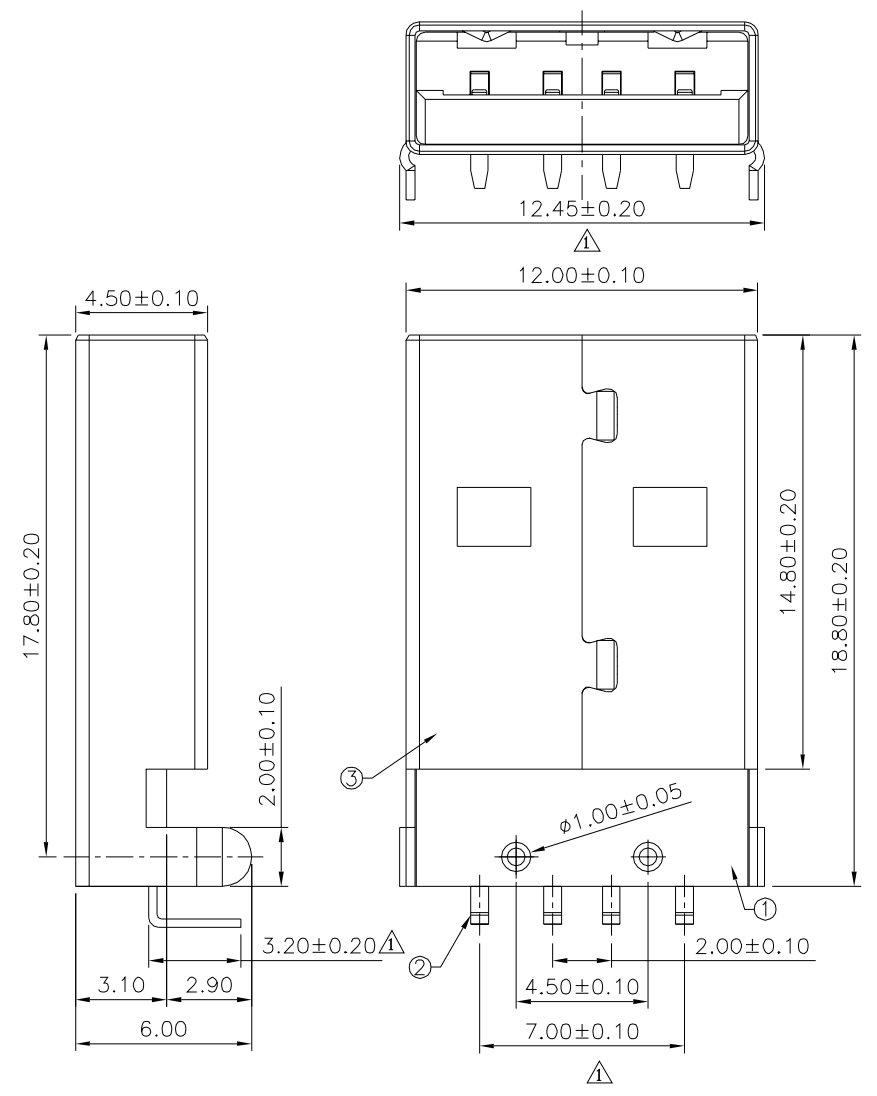

③ Shell	1	Cold Rolled Steel	Nickel Plated Over Copper
② Contact	4	Brass	Gold Flash On Contact Area, Tin Plated On Solder Tails, Over Nickel
① Housing	1	PBT	UL94V-0, Black
△ No. Description	Q'ty	Material	Remark

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △  
 10018  
 SCALE NONE

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP  
 REV. B1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.30  
 .XX ±0.20  
 .XXX ±0.10  
 ANG. ±1°  
 UNIT mm

△ B1	Modify Data	HZF	11/13/2017
△ B0	Modify Data	HZF	09/22/2010
△ B0	NEW RELEASE	HZF	09/22/2010
NO. REV.	REVISIONS	CHK	DATE