
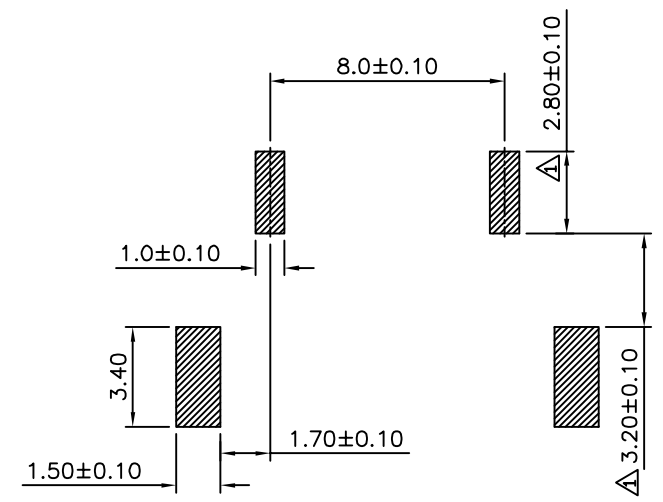

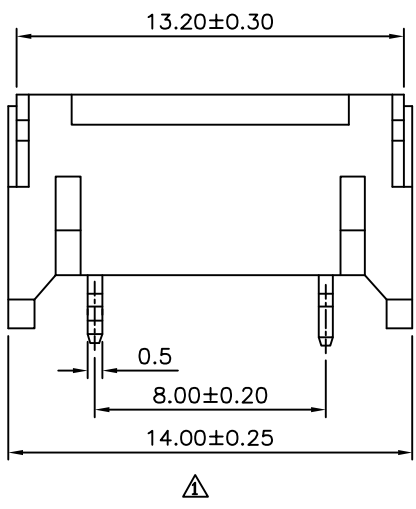


△ SPECIFICATION

Current Rating: 1A AC/DC  
 Voltage Rating: 600V AC/DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Withstanding Voltage: 1800V AC/Minute  
 Contact: Brass, Tin Plated  
 Insulator: PA6T(UL94V-0)  
 RoHS Compliant

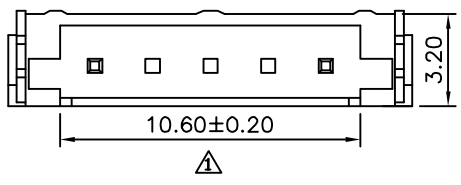

Recommended P.C.B. Layout






**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.5 .XX ±0.1
10072		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		YBL		
SCALE	NONE	REV.	A1	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	12/06/2013
△ A0		NEW RELEASE		

**SPECIFICATION**

Material:PS  
 Q'ty:1000 PCS/Reel  
 RoHS Compliant

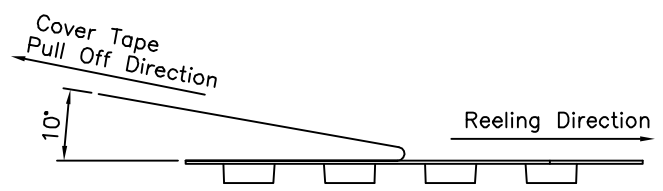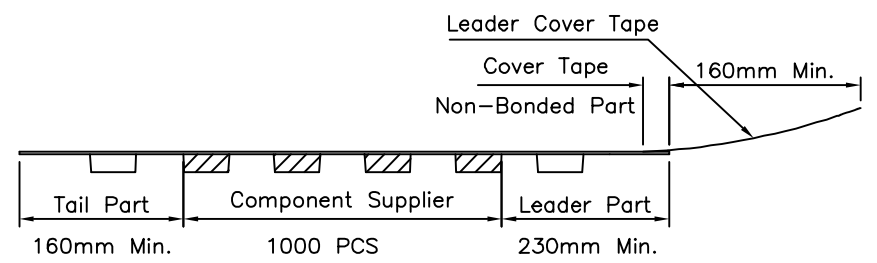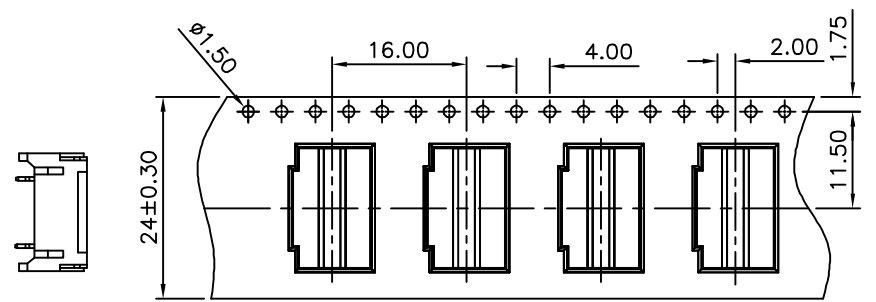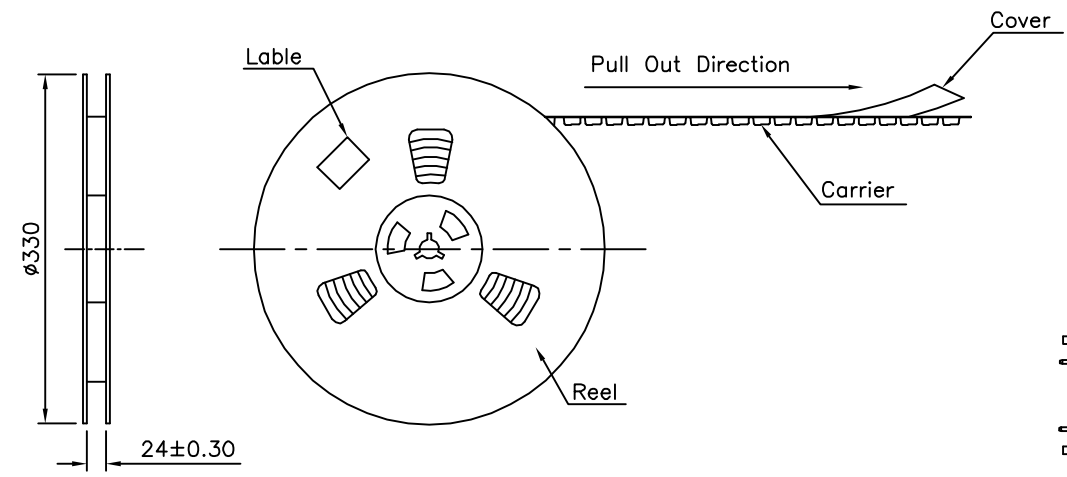

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X $\pm$ 0.35 X* $\pm$ 2* .XX $\pm$ 0.25 .X* $\pm$ 1* .XXX $\pm$ 0.15 .XX* $\pm$ 0.5*
10072		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		YBL		
SCALE	NONE	REV.	A1	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
	A1	Modify Data	HZF	12/06/2013
	A0	NEW RELEASE		