
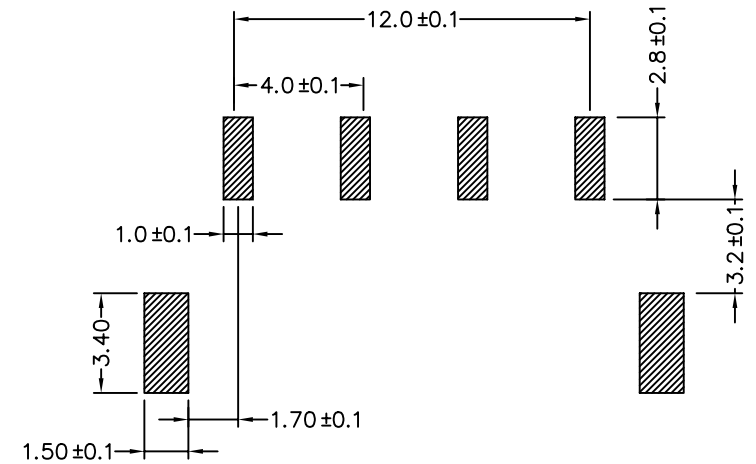
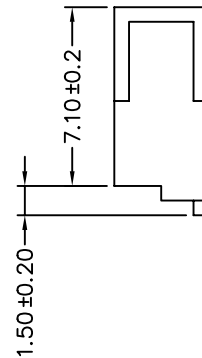
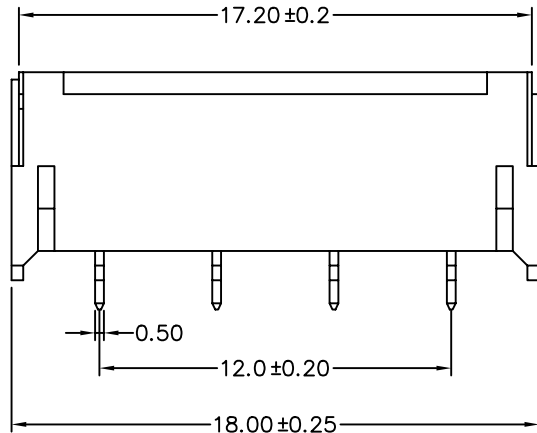


**SPEICIFCATIONS**

Curent Rating : 1A, AC, DC  
 Voltage Rating : 130V AC, DC  
 Temperature Range : -25°c to +85°c  
 Contact Resistance : 20milliohms Max.  
 Insulation Resistance : 1000Megohms Min.  
 Withstanding Voltage : 500V AC/minute  
 Terminal Material : Brass/Tin-plated  
 Material : Nylon 6T, UL 94V-0  
 Package:1000 Pcs/Reel

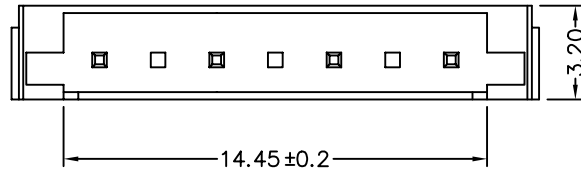

P.C.Board Layout

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 10074

APPROVED BY MEI  
 CHECKED BY BECKY  
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG. ±1°

SCALE NONE

REV. A0

UNIT mm

NO. REV.

A0 NEW RELEASE  
 REVISIONS

MEI  
 CHK DATE