
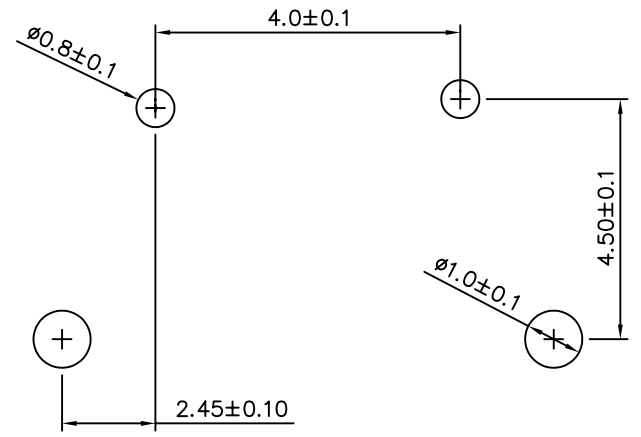
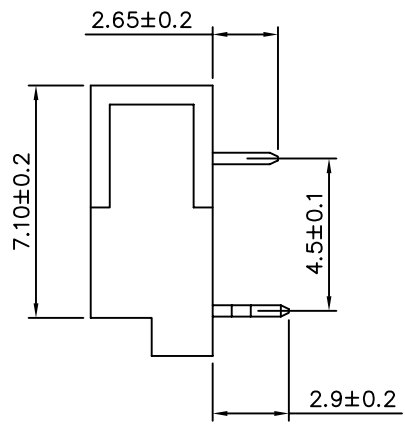
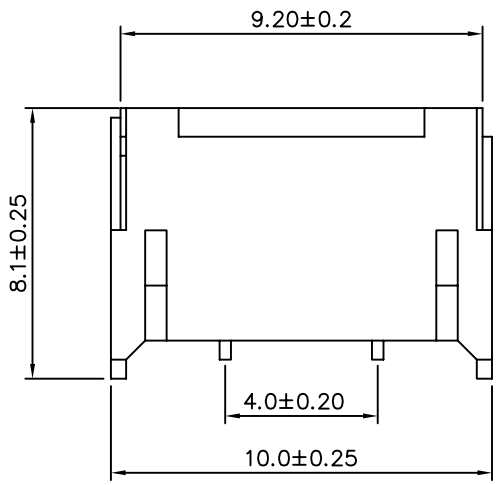


SPECIFICATIONS

Current Rating: 1A AC,DC
 ⚠ Voltage Rating: 600V AC,DC
 Temperature Range: -25°C To +85°C
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Withstanding Voltage: 500V AC/Minute
 Terminal: Brass, Tin Plated
 Insulator: Nylon 6T, UL 94V-0

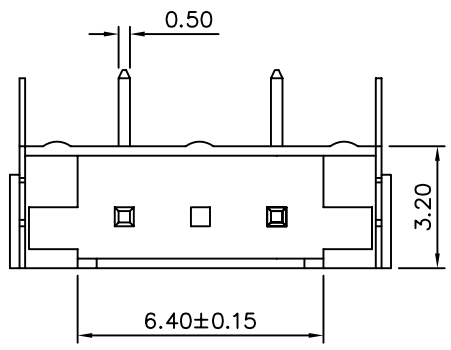

P.C.Board Layout

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|-------------|----|--|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.20 .XX ±0.10 ANG. |
| 10079 | | MEI | | |
| | | CHECKED BY | | |
| | | RAN | | |
| | | DRAWING BY | | UNIT mm |
| | | HXY | | |
| SCALE | NONE | REV. | A1 | |

| | | | | |
|------|------|-----------------------------|-------|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| ⚠ A1 | | Voltage Rating: 130V → 600V | BECKY | 07/06/2005 |
| ⚠ A | | NEW RELEASE | RAN | |