
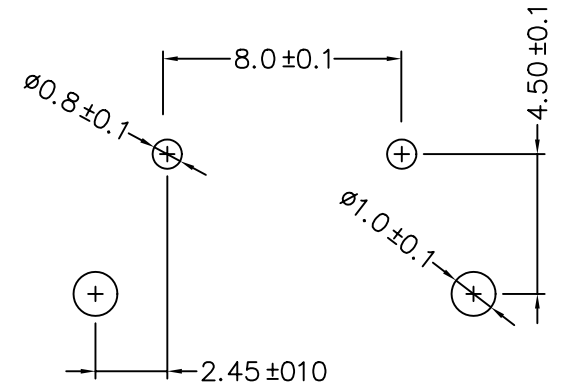
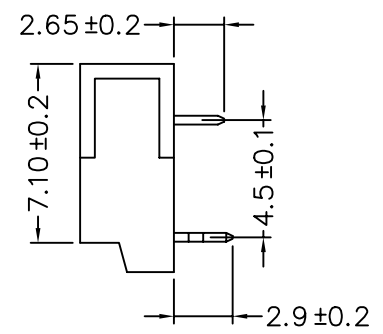
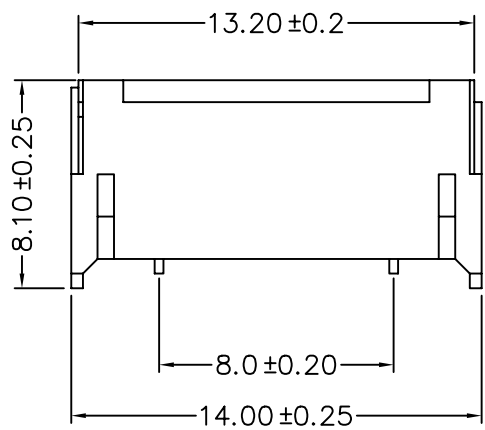


SPECIFICATIONS

Current Rating : 1A, AC, DC
 Voltage Rating : 130V AC, DC
 Temperature Range : -25°C To +85°C
 Contact Resistance : 20milliohms Max.
 Insulation Resistance : 1000Megohms Min.
 Withstanding Voltage : 500V AC/minute
 Terminal Material : Brass/Tin-plated
 Insulator: Nylon 6T, UL 94V-0

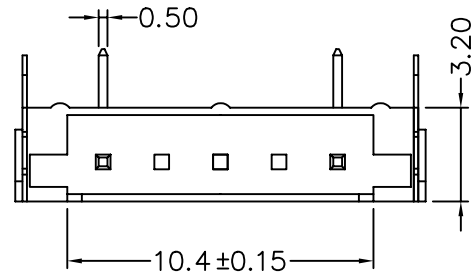

P.C.Board Layout

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.20 .XX ±0.10 ANG.
10080		MEI		
		BECKY		
		DRAWING BY		UNIT mm
		HZF		
SCALE	NONE	REV.	A0	UNIT

NO.	REV.	REVISIONS	MEI	DATE
△A0	A0	NEW RELEASE	MEI	
			CHK	