

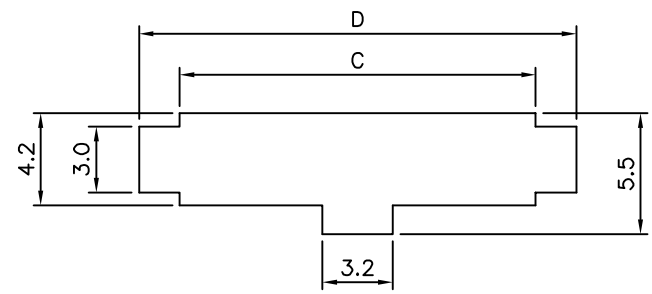
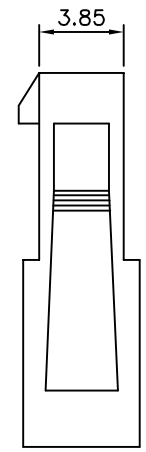


SPECIFICATION

- 1. General Characteristics**
3.0mm Micro Fit 1XXX Plug
- 2. Material&Finish**
Insulator: Polyester UL94V-0, Black
- 3. Electrical Characteristics**
Current Rating: 5A AC/DC
Voltage Rating: 250V AC/DC
Withstand Voltage: 1500V AC/Minute
Insulation Resistance: 1000 Megaohms Min.
- 4. Environmental Characteristics**
Temperature Range: -25°C ~ +85°C
- 5. RoHS Compliant**

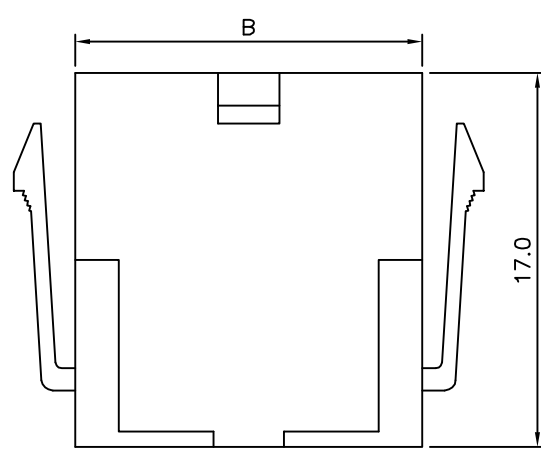

Panel Hole Dimensions

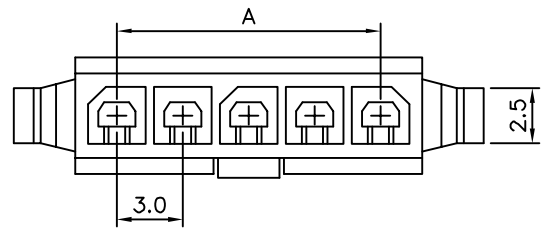

Circuits	Dim A	Dim B	Dim C	Dim D
2	3.0	6.8	7.2	10.9
3	6.0	9.8	10.2	13.9
4	9.0	12.8	13.2	16.9
5	12.0	15.8	16.2	19.9
6	15.0	18.8	19.2	22.9
7	18.0	21.8	22.2	25.9
8	21.0	24.8	25.2	28.9
9	24.0	27.8	28.2	31.9
10	27.0	30.8	31.2	34.9
11	30.0	33.8	34.2	37.9
12	33.0	36.8	37.2	40.9

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25
10134		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		LXX		
SCALE	NONE	REV.	A0	UNIT
				mm

NO.	REV.	DESCRIPTION	CHK	DATE
△ A0		NEW RELEASE	HZF	05/30/2009
		REVISIONS		