



**△△△ SPECIFICATION**

Current Rate:3 Amp  
 Withstand Voltage:500V AC For 1 Minute  
 Contact Resistance:20 Milliohms Max.  
 At DC 100mA  
 Insulation Resistance:5000 Megaohms Min.  
 At 500V DC  
 Housing:PBT+30%G.F.(UL94-V0)  
 Contact:Brass,Gold Flash Over Nickel  
 Operating Temperature:-55°C~+105°C  
 RoHS Compliant


Insulator Color	P/N
Blue	05726
Green	10208
Red	05729
White	05727
Yellow	05730



△

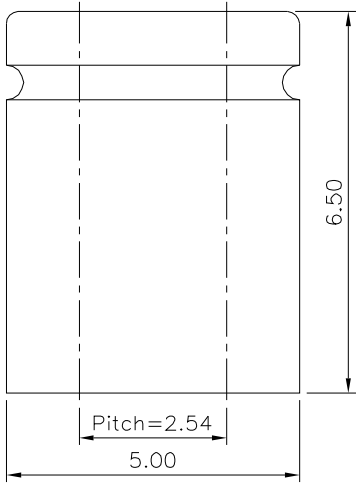

△△

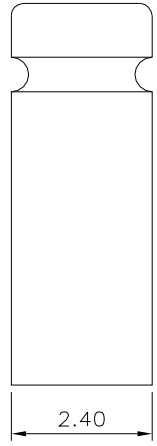

△

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △△  
 10208

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.30  
 .XX ±0.20  
 ANG. ±3° △

NO.	REV.	REVISIONS	CHK	DATE
△	A4	Modify Data	HZF	12/05/2019
△	A3	Modify Data	HZF	07/18/2017
△	A2	Modify Data	HZF	10/16/2013
△	A1	Modify Data	HZF	12/15/2009
△	A0	NEW RELEASE	MEI	06/02/1999

SCALE NONE REV. A4 UNIT mm