

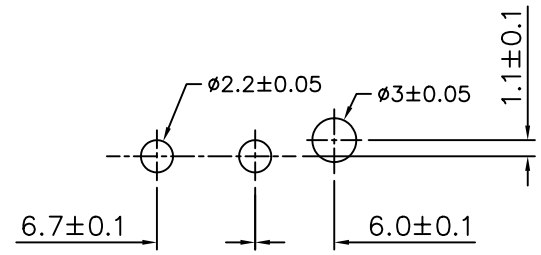
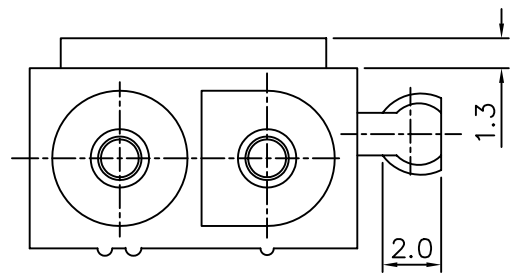


SPECIFICATIONS
 Housing: Nylon66, UL 94V-2, Nature
 Contact: Brass, Tin Plated
 Current Rating: 12A AC, DC
 Voltage Rating: 600V AC, DC
 Dielectric Withstanding Voltage: 5000V AC RMS
 Ambient Temp. Range: -40°C ~ +105°C
 (Including Temperature Rise)

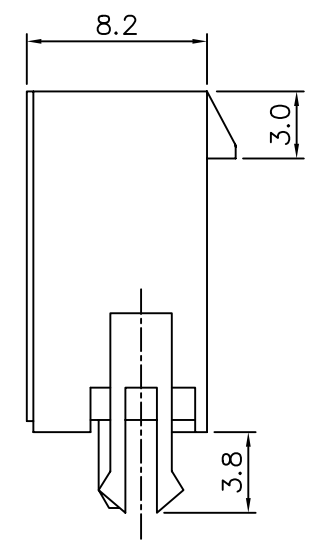

RECOMMENDED P.C. BOARD HOLE DIM.

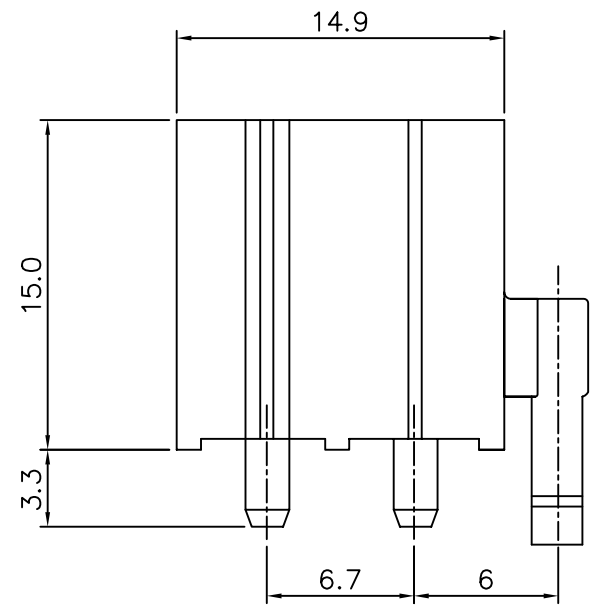

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 10376

APPROVED BY MEI
 CHECKED BY BECKY
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.25
 .XX ±0.15
 .XXX ±0.05

SCALE NONE

REV. A0

UNIT mm

NO. REV.

A0 NEW RELEASE
 REVISIONS

MEI
 CHK DATE