

P.C.B EDGE
RECOMMENDED P.C.B LAYOUT

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 3 Amperes.
Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
Insulation Resistance: 5000 Medohms Minimum.at DC 500V
Contact Resistance: 25 Milliohms Maximum.
Operating Temperature: -55°C to +105°C.

MECHANICAL CHARACTERISTICS:


Contact Insertion Force: 341 g. Maximum.
Contact Separation Force: 21 g. Minimum.

MATERIALS:

Contacts: Brass.
Insulator: PBT UL 94V-0 Rated.
Shell: Cold Roller Steel.

FINISHES:

Contact: Gold Flash.
Shell: Nickel Plated.

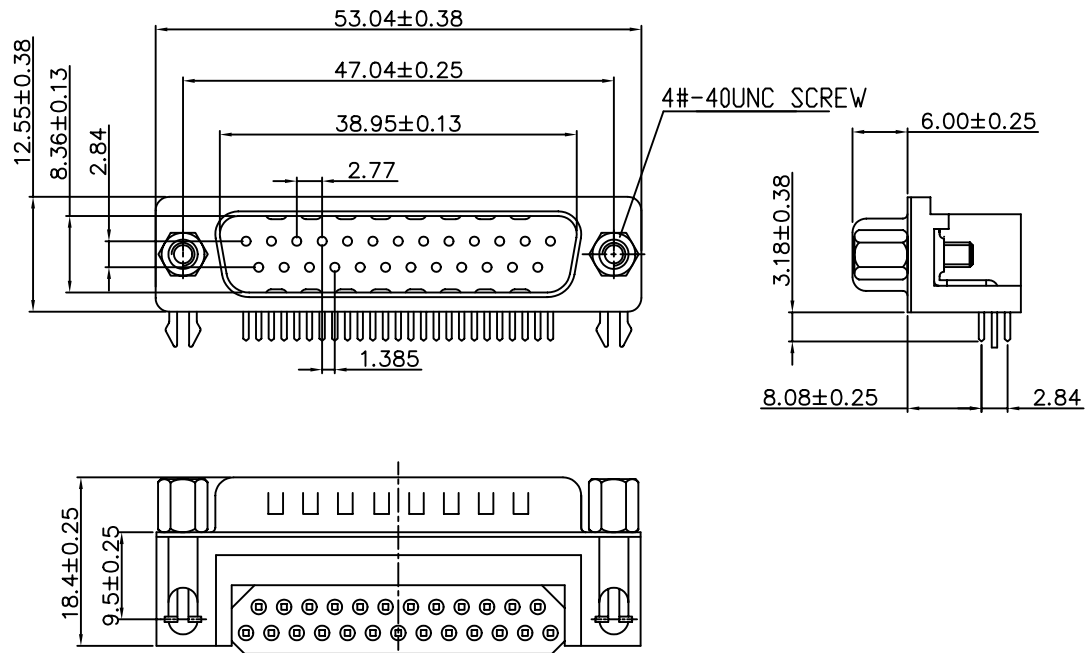

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

10496

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE

.X ±0.25

.XX ±0.13

.ANG ±2°


SCALE

NONE

REV.

A0

UNIT
mm



NO. REV.

A0

NEW RELEASE

REVISIONS

MEI

DATE