
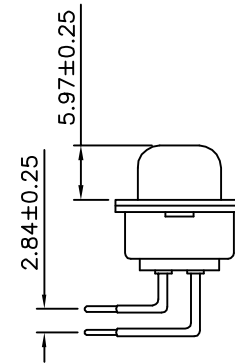
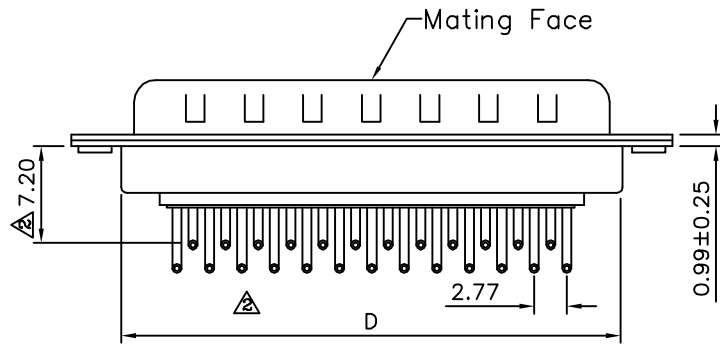


**△△ SPECIFICATION**  
 Dielectric Withstanding Voltage:1000V AC Per Minute  
 Contact Resistance:10 Milliohms Max.  
 Insulation Resistance:5000 Megaohms Min.  
 Operation Temperature:-55°C~+125°C  
 Insulator:PBT+30%G.F.(UL94V-0),White  
 Contact:Brass,Gold Flash Over Nickel  
 Metal Shell:Steel,Tin Plated Over Nickel  
 RoHS Compliant

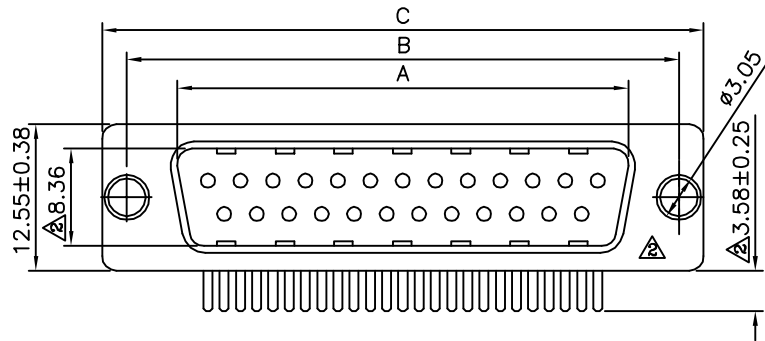

△△ Contact	A±0.25	B±0.13	C±0.38	D±0.25	E±0.25
09	16.92	24.99	30.81	19.28	11.08
15	25.25	33.32	39.14	27.51	19.39
25	38.96	47.04	53.04	41.28	33.24
37	55.42	63.50	69.32	57.71	49.86

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 10577

APPROVED BY EMILY  
 CHECKED BY HZF  
 DRAWING BY SAN

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.3  
 .XX ±0.3  
 .XXX ±0.3  
 ANG. ±2°

NO.	REV.	REVISIONS	CHK	DATE
△	A4	Modify Spec.	HZF	05/29/2014
△	A3	Modify P/N Code	HZF	01/21/2011
△	A2	Modify Data	HZF	12/18/2009
△	A1	Modify Data	SHIN	03/06/2007
△	A0	NEW RELEASE		

SCALE NONE

REV. A4

UNIT mm

NO. REV. REVISIONS CHK DATE