


SPECIFICATIONS

Current Rating:1Amp
Voltage Rating:250VAC/RMS 60Hz
Contact Resistance:20 Milliohms Max. At 1 Amp DC.
Insulation Resistance:1000 Megohms At 500 VDC
Dielectric Withstanding Voltage:1000 VAC/RMS 60Hz For 1 Minute
Insulator:See Ordering Info For Colour Type
Contact:Copper Alloy
Shell:SPCC

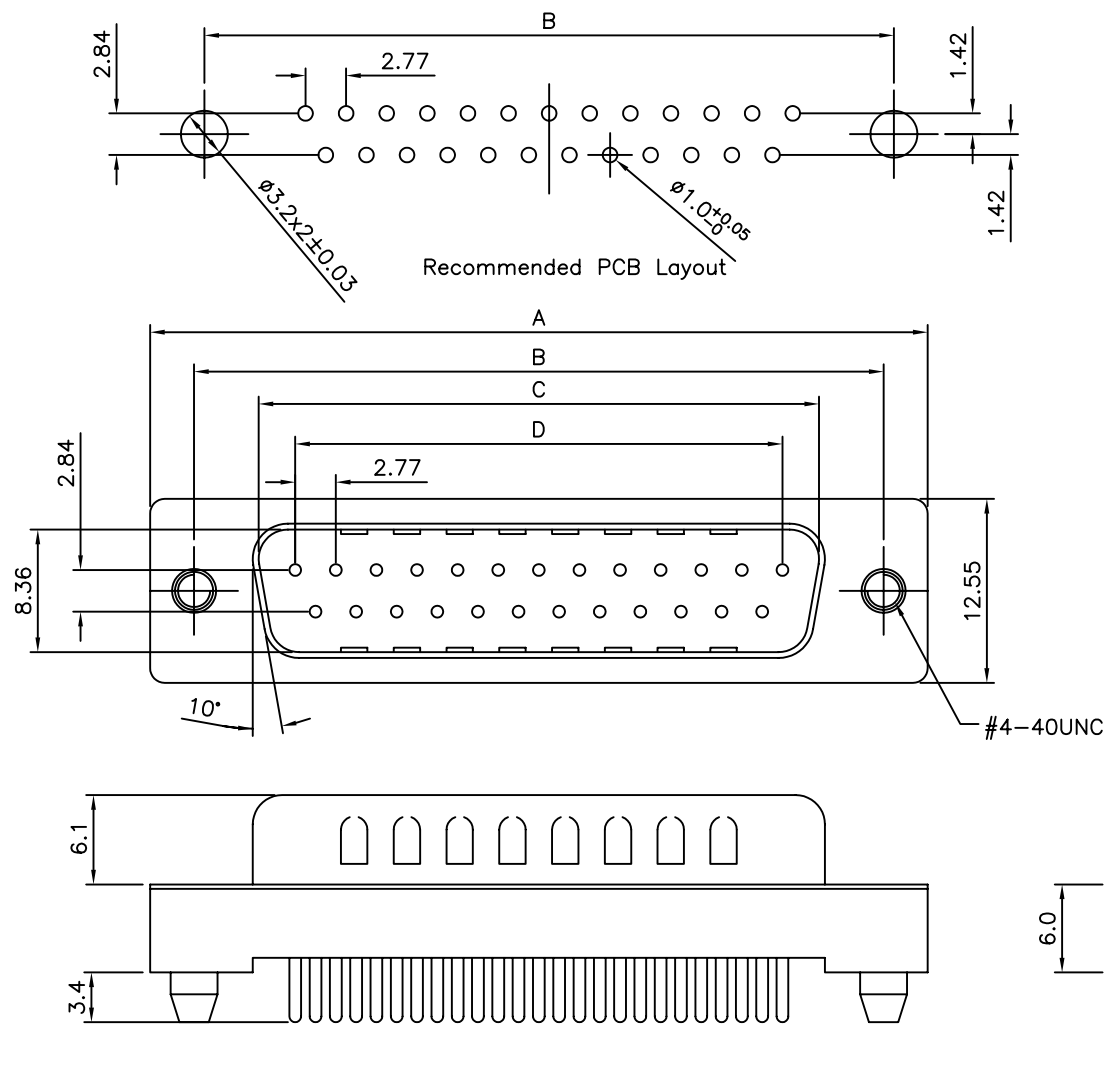

Pin	A	B	C	D
9	30.81	24.99	16.92	11.08
15	39.14	33.32	25.50	19.39
25	53.04	47.04	38.96	33.24
37	69.32	63.50	55.42	49.86

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

10630

APPROVED BY

MEI

CHECKED BY

SHIN

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
X. ± 0.38	
.X ± 0.25	X.* $\pm 3^\circ$
.XX ± 0.13	.X.* $\pm 1.0^\circ$

 $\triangle O$

5	△
---	---

0	BO	NEW RELEASE
NO. REV.		REVISI

RELE

RELEASE
REVISIONS

SH

SHIN	02/07/2007
CHK	DATE

--	--