


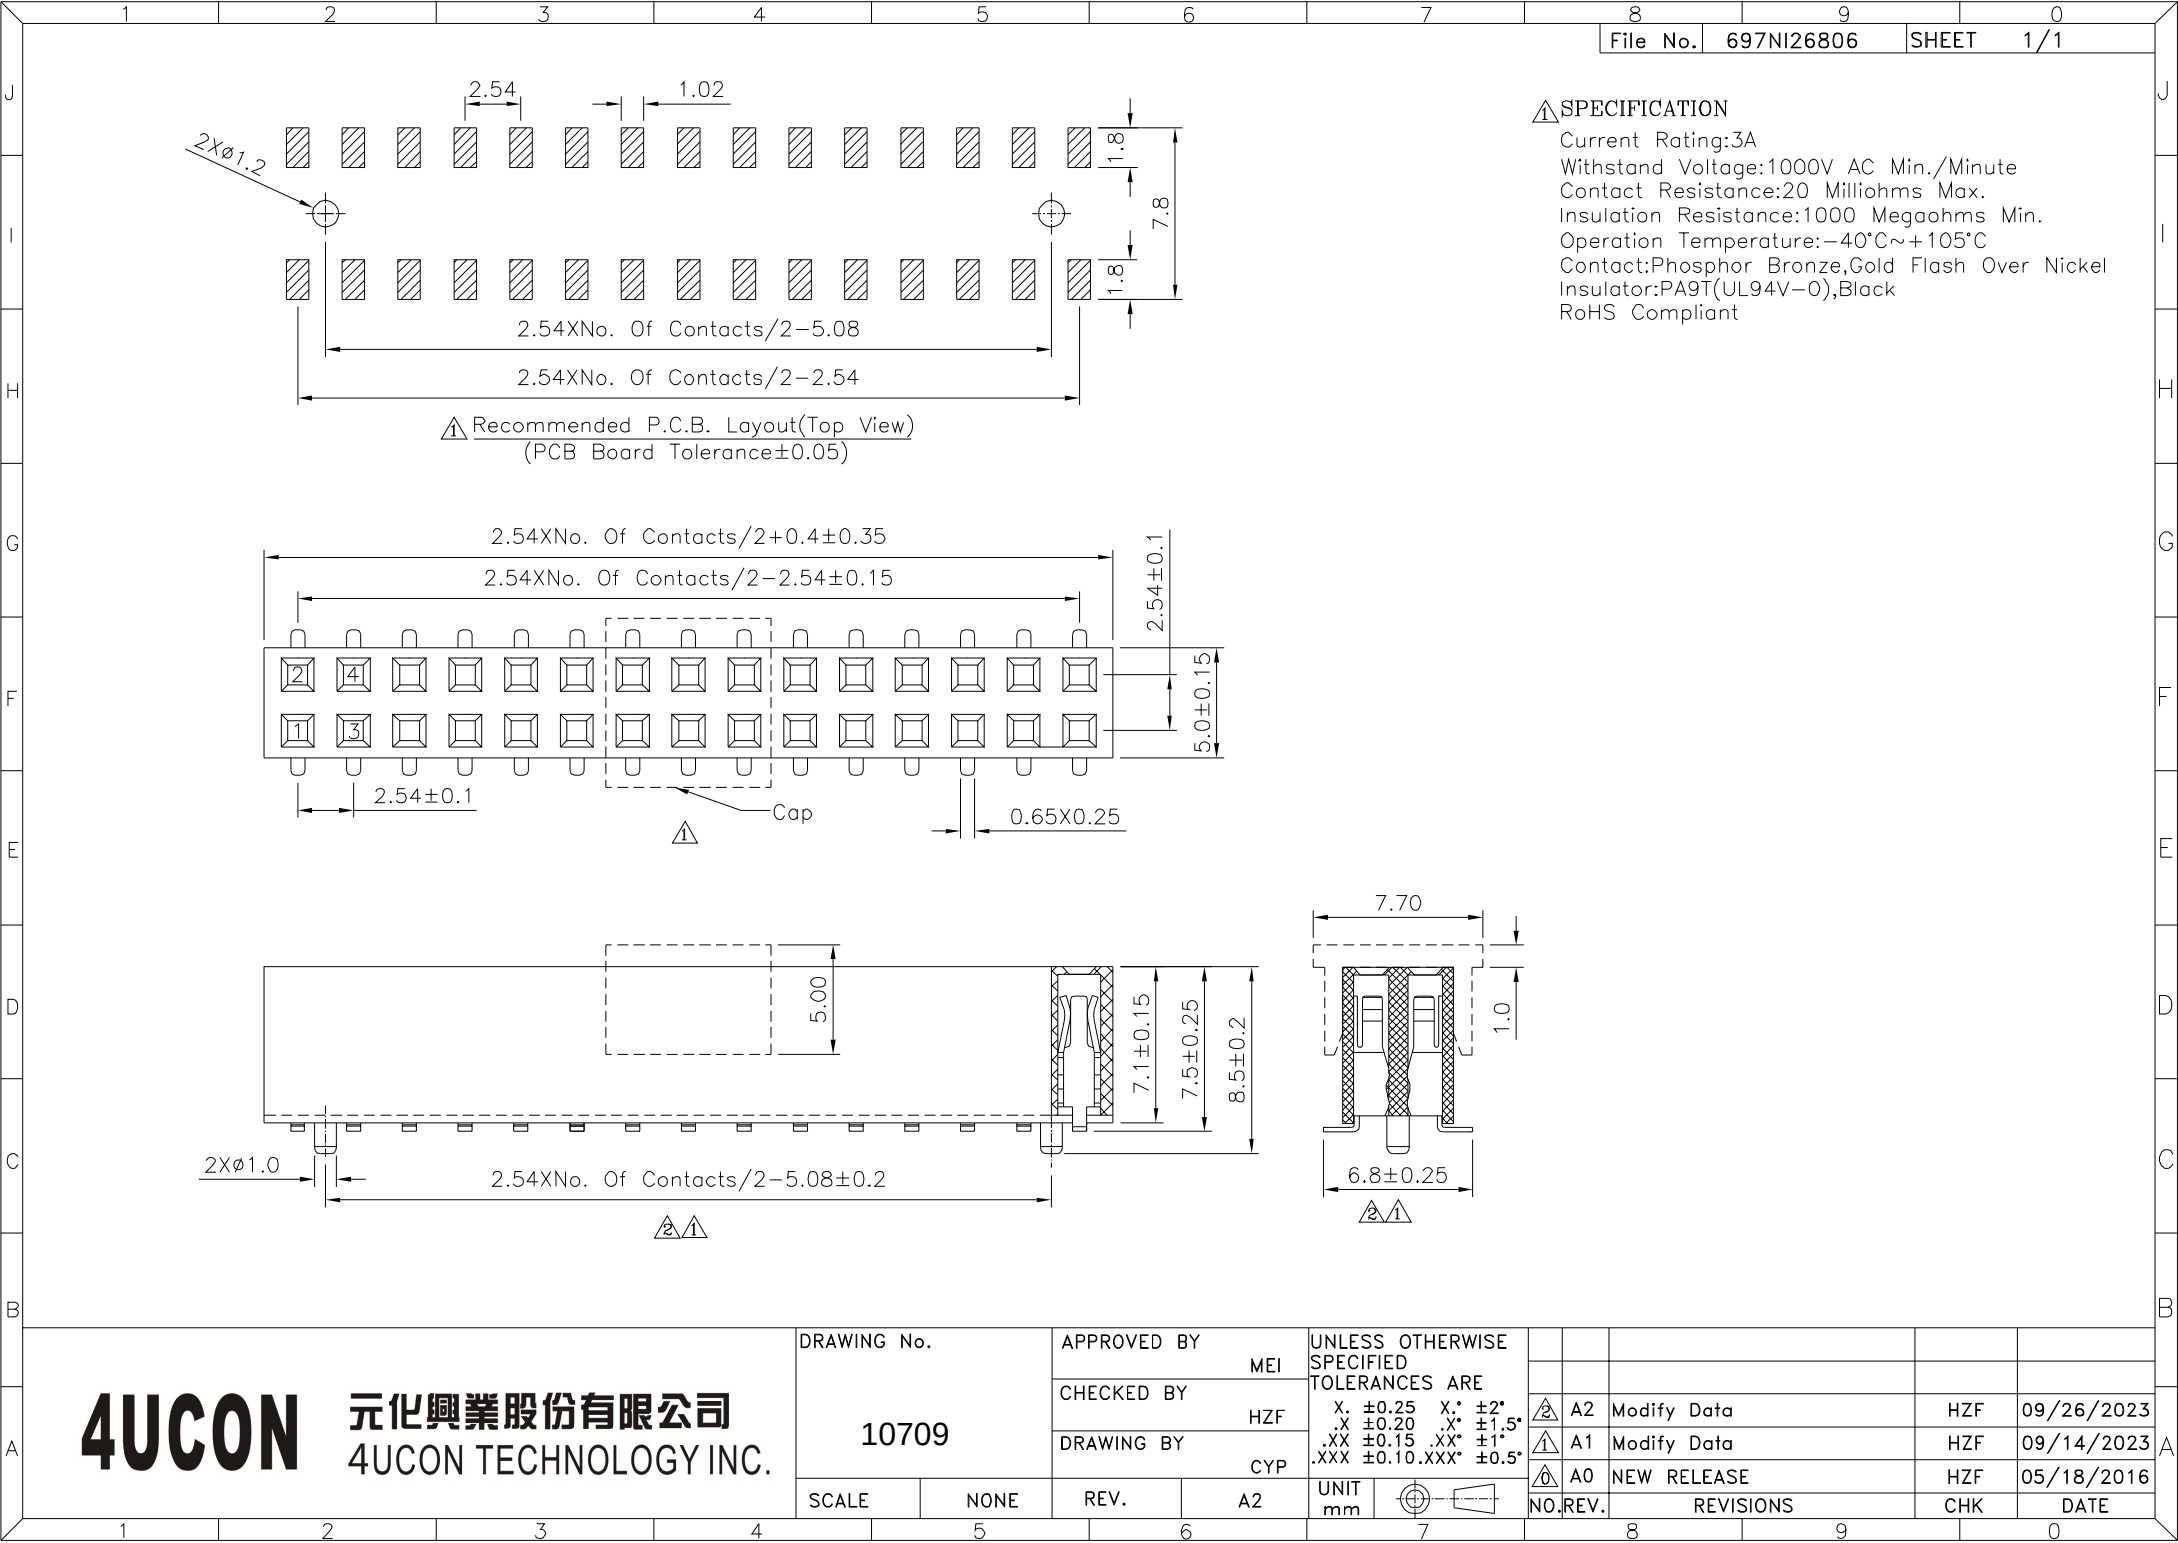

△ SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA9T(UL94V-O),Black
RoHS Compliant

△ Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

△

△△

△△

4Ucon 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
10709		MEI	
		CHECKED BY	
		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
X. ±0.25 X. ±2°					
.XX ±0.20 .XX ±1.5°		△ A2	Modify Data	HZF	09/26/2023
.XXX ±0.15 .XXX ±1°		△ A1	Modify Data	HZF	09/14/2023
.XXX ±0.10 .XXX ±0.5°		△ A0	NEW RELEASE	HZF	05/18/2016
UNIT	mm	NO. REV.	REVISIONS	CHK	DATE