

SPECIFICATION

Current Rating:3.0 Amp/Contact Max.

Withstand Voltage:1000V AC/Minute

Contact Resistance:20 Milliohms Max./Contact


Insulation Resistance:1000 Megaohms Min. At 100V

Operation Temperature:-55°C~+105°C



Contact:Phosphor Bronze,Gold Flash Over Nickel

Insulator:PA6T+30%G.F.(UL94V-0),Black


RoHS Compliant

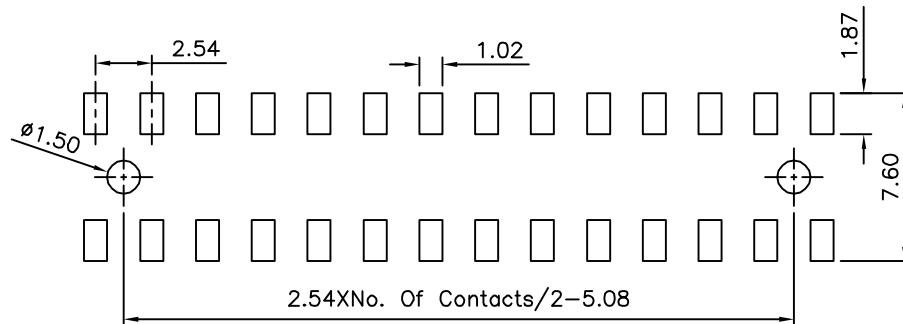

Recommended P.C.B. Layout

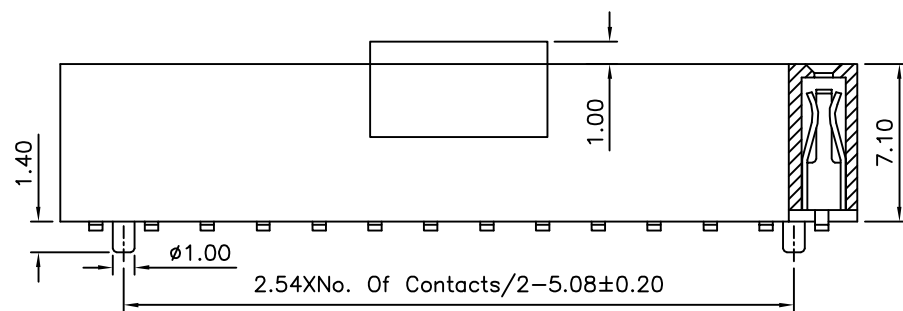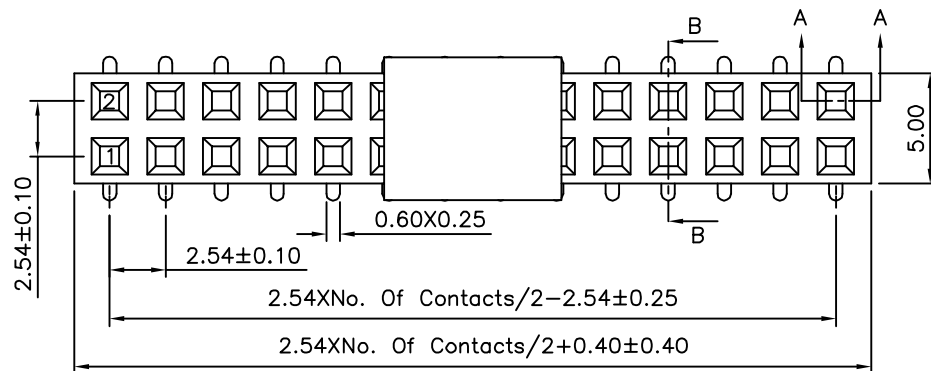

Section A-A

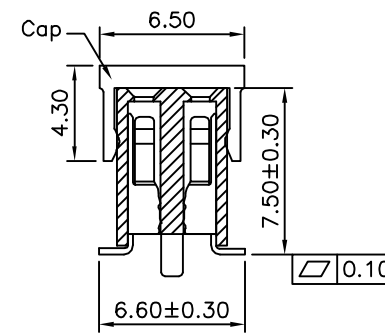

Section B-B

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

10720

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.50

.X ±0.30

.XX ±0.20

.XXX ±0.10

ANG. ±5°

UNIT

mm



NO. REV.

NEW RELEASE

REVISIONS

HZF

CHK

03/07/2012

DATE