



**SPECIFICATION**






Current Rating:1 Amps  
 Withstand Voltage:500V For 1 Minute  
 Contact Resistance:30 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 At 500V DC  
 Operation Temperature:-55°C~+105°C  
 Insulator:PBT+30%G.F.(UL94V-0),White  
 Contact:Brass,Gold Flash Over Nickel  
 Shell:Steel,Front:Nickel Plated,Rear:Tin Plated  
 Screw:Steel,Nickel Plated  
 Boardlocks:Brass,Tin Plated  
 RoHS Compliant

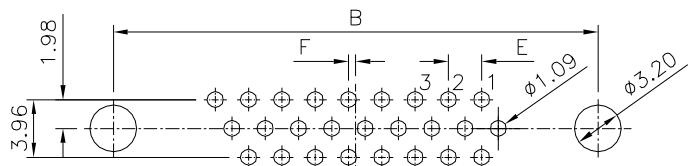

Recommended P.C.B. Layout(26,44,62 Pin)

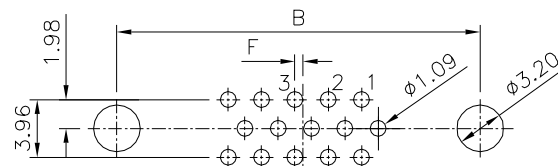

Recommended P.C.B. Layout(15 Pin)

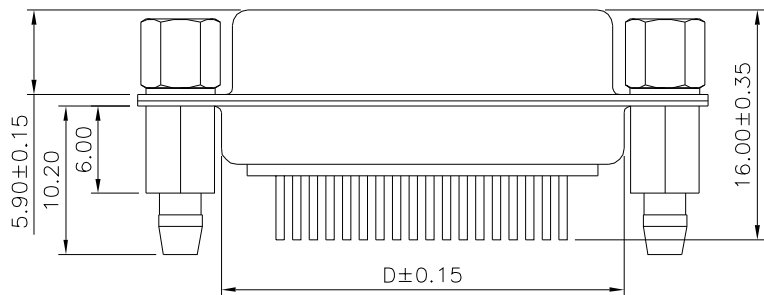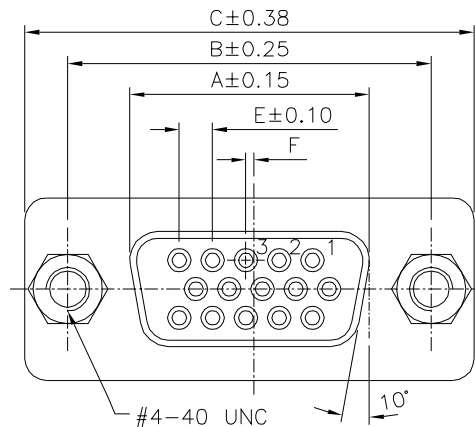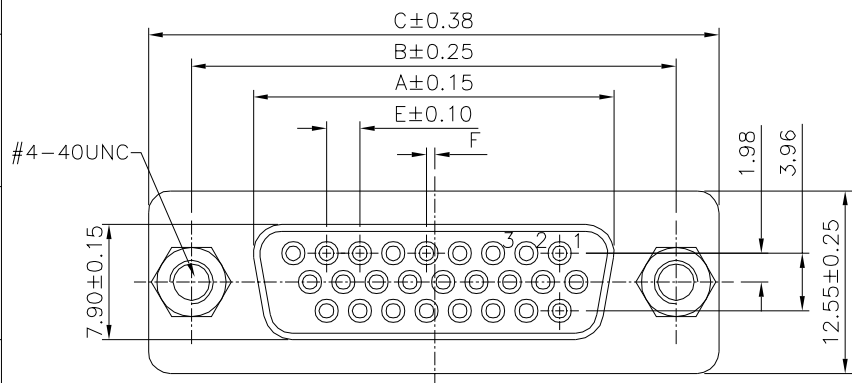

Item No.	PIN
10959	15
22469	26

Pin	A	B	C	D	E	F
15	16.33	24.99	30.81	19.20	2.29	0.25
26	24.80	33.32	39.20	27.70	2.29	0.50
44	38.38	47.04	53.04	41.10	2.29	0.50
62	54.84	63.50	69.40	57.30	2.41	0.60

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

10959

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.38 .X\* ±3\*  
 .XX ±0.25 .XX\* ±1\*  
 .XXX ±0.10 .XXX\* ±0.5\*

SCALE


NONE

REV.

B0

UNIT

mm



NO. REV.





B0 NEW RELEASE

CHK

HZF 02/15/2023

REVISIONS

DATE

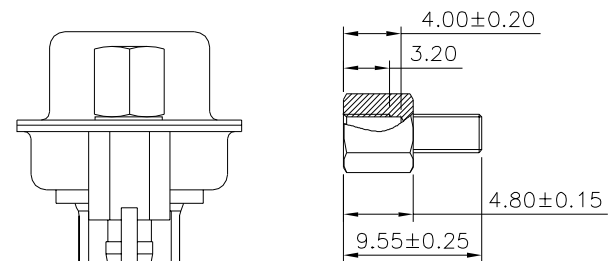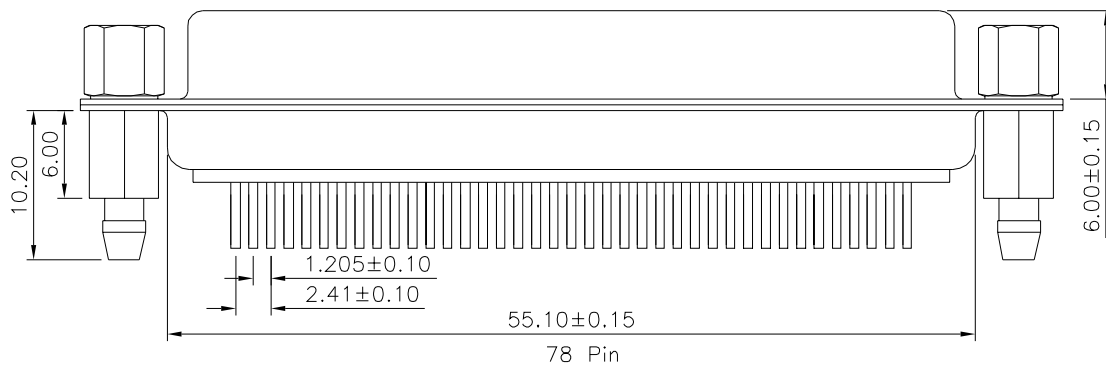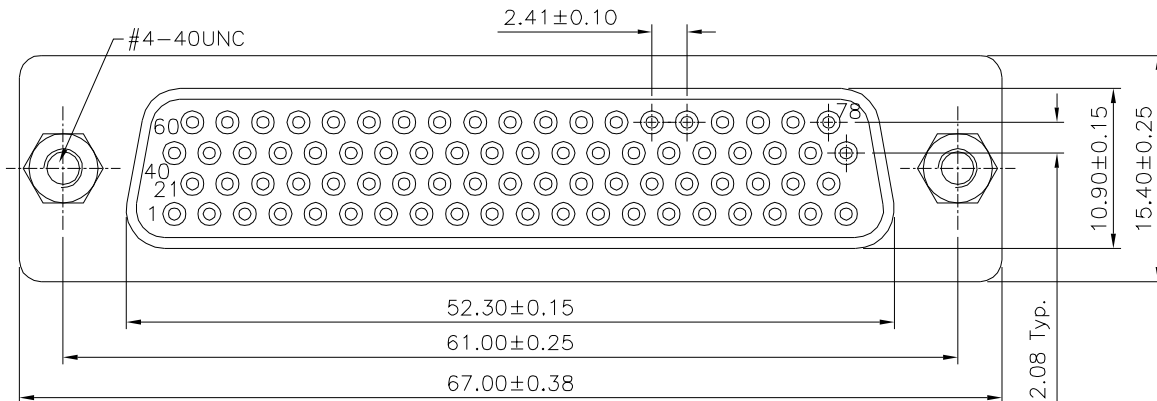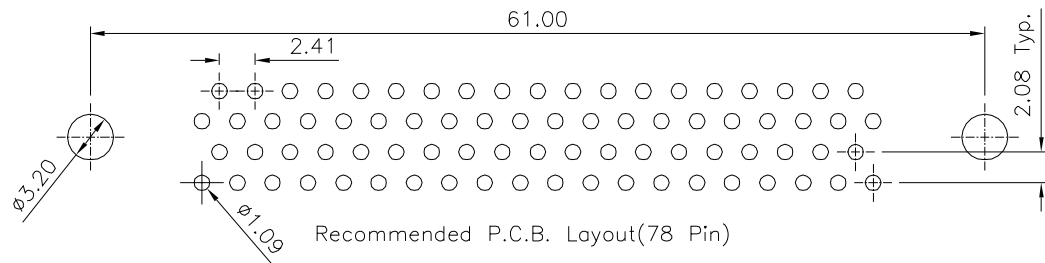

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

10959

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

B0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.38 .X\* ±3\*  
.XX ±0.25 .XX\* ±1\*  
.XXX ±0.10 .XXX\* ±0.5\*

UNIT  
mm



NO. REV.

B0 NEW RELEASE

REVISIONS

CHK

DATE

HZF 02/15/2023