

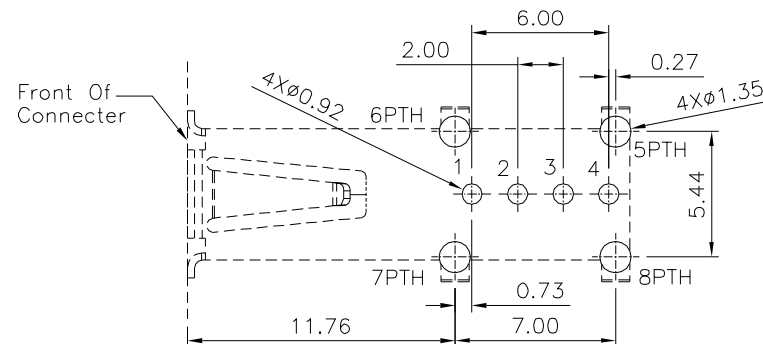
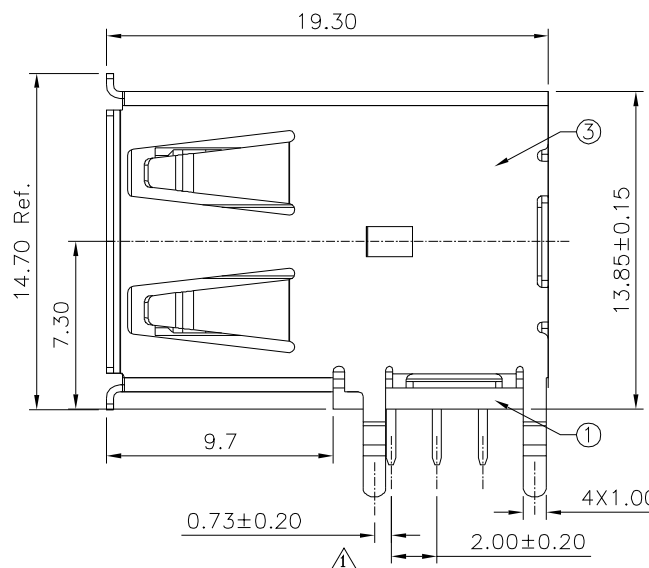


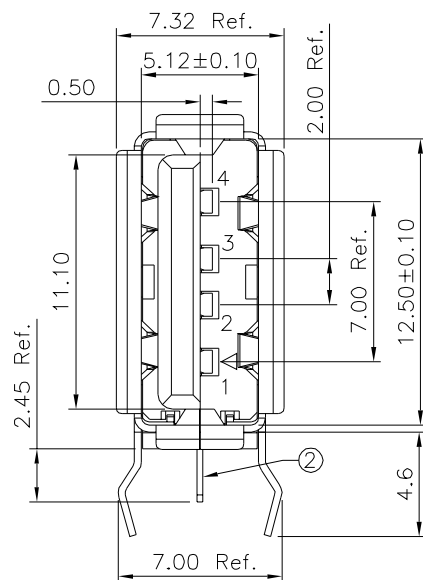

Recommended P.C.B. Layout(Top View)

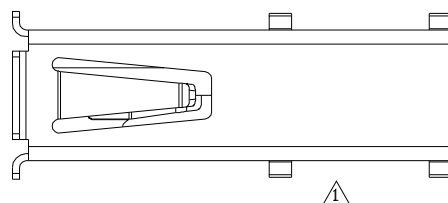

SPECIFICATION

Rated Voltage And Current:1A At 250V AC Min.

Withstanding Voltage:500V AC/1 Minute

Without Breakdown

Contact Resistance:Before Life Test 30 Milliohms Max.

After Life Test 50 Milliohms Max.

Insulation Resistance:1000 Megaohms Min. At 500V DC

Temperature Range:-55°C~+85°C

RoHS Compliant

Item No.	Insulator Color
10968	Black
11343	White

No.	Name	Q'ty	Material	Finish
1	Housing	1	PBT UL94V-0	
2	Contact	4	Brass	Gold Plated On Contact Area,Matte Tin Plated On Solder Tails,Over Nickel
3	Shell	1	Steel	Nickel Plated

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

10968

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

B2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG. $\pm$ 1°

UNIT
mm

NO.	REV.	REVISIONS	CHK	DATE
2	B2	Modify Data	HZF	11/07/2023
1	B1	Modify Data	HZF	06/22/2021
0	B0	NEW RELEASE	HZF	11/10/2020