
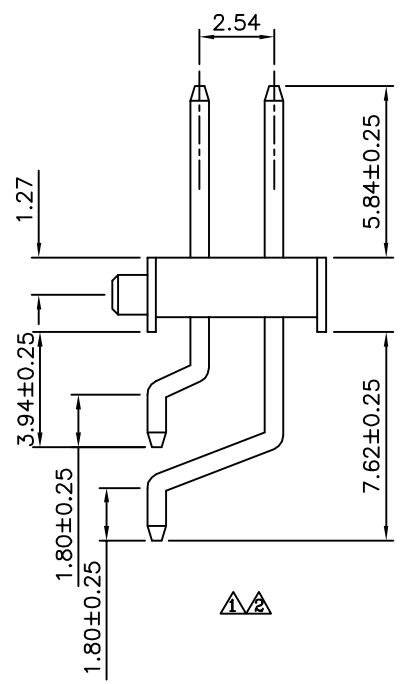


Recommended P.C.B. Layout

△ SPECIFICATION
 Current: 3A
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Withstanding Voltage: 1000V AC RMS
 Operation Temperature: -55°C ~ +105°C
 Housing: PA6T(UL94V-0), Black
 Contact: Copper Alloy, Gold Flash
 No. Of Contacts: 06 ~ 80 Contacts
 RoHS Compliant

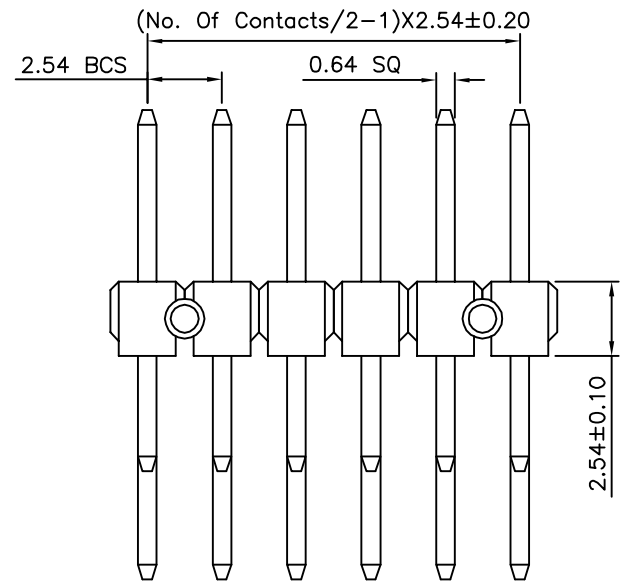

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°
11021		EMILY		
		CHECKED BY HZF		
		DRAWING BY WSS		
SCALE	NONE	REV.	A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	06/10/2011
△A1		Modify Data	HZF	09/10/2010
△A0		NEW RELEASE	HZF	09/15/2006