
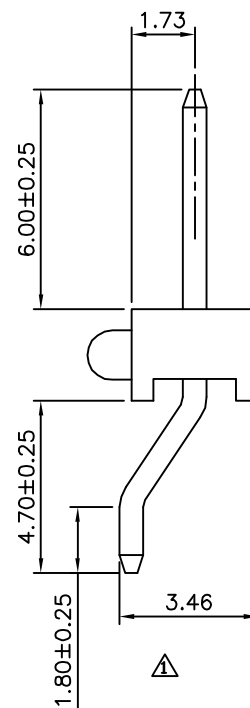
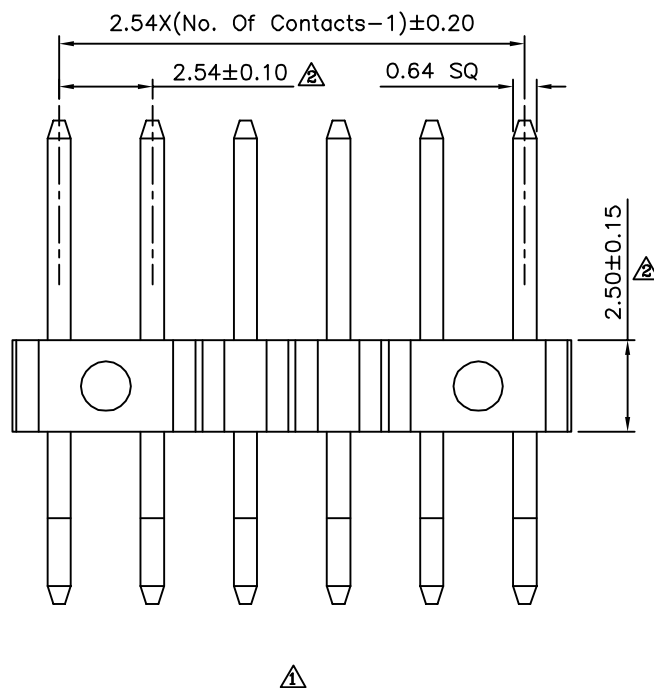
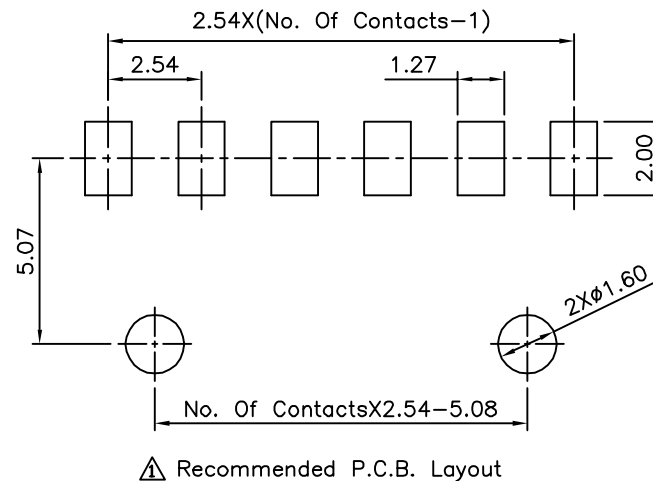


△ SPECIFICATION

Current:3A
Withstanding Voltage:1000V AC RMS
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-55°C~+105°C
Housing:PA6T(UL94V-0),Black
△ Contact:Copper Alloy,Gold Flash Over Nickel
No. Of Contacts:03~40 Contacts
RoHS Compliant

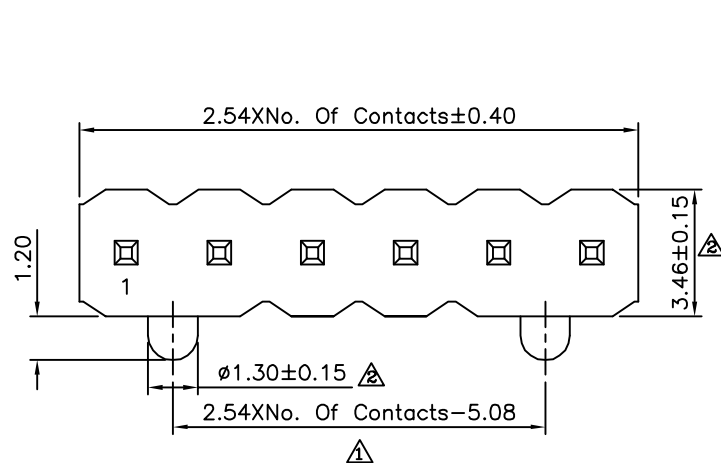

DRAWING No. 11042		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°							
		EMILY									
		CHECKED BY									
		HZF									
		DRAWING BY					A2	Modify Data		HZF	11/22/2012
							A1	Modify Data		HZF	12/13/2010
							A0	NEW RELEASE		HZF	09/27/2006
SCALE	NONE	REV.	A2	UNIT		NO. REV.	REVISIONS			CHK	DATE
	5		6		7		8		9		0

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.