

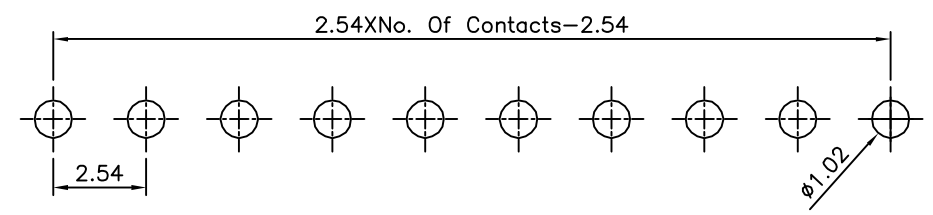



SPECIFICATION

Current Rating:3 Amps
 Withstanding Voltage:500V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:-40°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

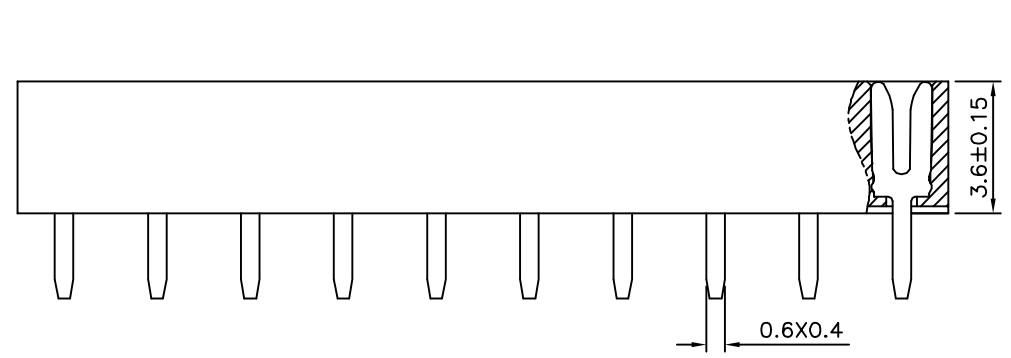

Recommended P.C.B. Layout
 PCB Board Tolerance±0.05(Top View)

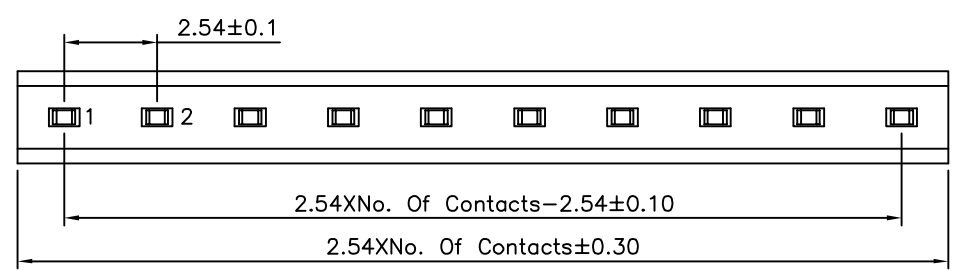

4UCON

元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X". ±2" .X ±0.20 .X" ±1.5" .XX ±0.15 .XX" ±1" .XXX ±0.10 .XXX" ±0.5"
11064		EMILY		
		CHECKED BY HZF		
		DRAWING BY SAN		
SCALE	NONE	REV.	A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Dim.	HZF	04/03/2014
△	A0	NEW RELEASE	HZF	09/07/2013