



**SPECIFICATION**


Current Rating:1A AC,DC  
 Voltage Rating:125V AC,DC  
 Withstand Voltage:250V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:100 Megaohms Min.  
 Temperature Range:-25°C~+85°C  
 Insulator:PA66(UL94V-0)  
 RoHS Compliant

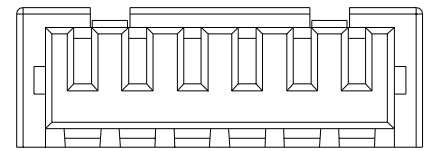


△




△ 2 Pin




△ 3 Pin

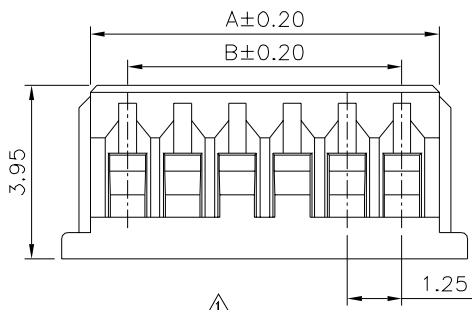


△



△

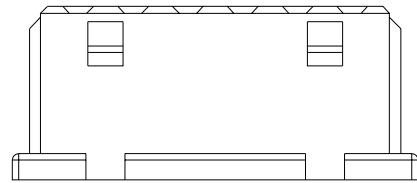

△

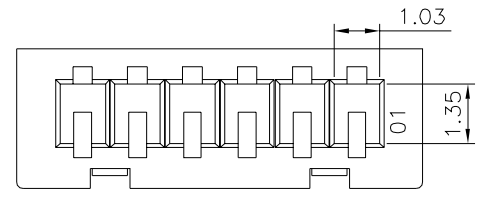

△

Pin	A	B
02	2.95	1.25
03	4.20	2.50
04	5.45	3.75
05	6.70	5.00
06	7.95	6.25
07	9.20	7.50
08	10.45	8.75
09	11.70	10.00
10	12.95	11.25
11	14.20	12.50
12	15.45	13.75
13	16.70	15.00
14	17.95	16.25
15	19.20	17.50
16	20.45	18.75

△

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X ±0.30 .XX ±0.20 .XXX ±0.10 X. ±3°
11094		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		CYP		
SCALE	NONE	REV.	A1	UNIT
				mm

△ A1	Modify Data	HZF	02/15/2019
△ A0	NEW RELEASE	HZF	07/20/2014
NO. REV.	REVISIONS	CHK	DATE