
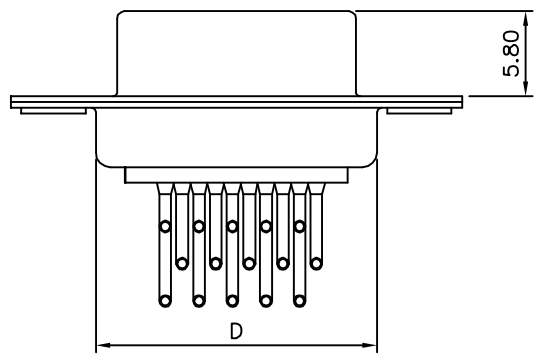
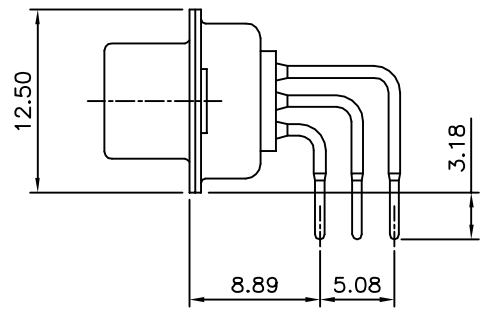


Recommended P.C.B. Layout

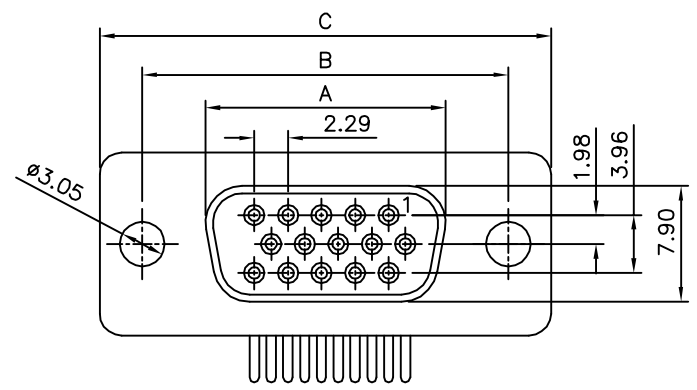

△ SPECIFICATION

Current Rating:5.0 Amps
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Dielectric Withstanding Voltage:1000V AC For 1 Minute
 Temperature Range:-55°C~+105°C
 Housing:PBT+30%G.F.(UL94V-0),Black
 Contact:Brass
 Gold Plated 5u" Over All,Over Nickel
 Shell:Steel,Front Nickel Plated After Tin
 RoHS Compliant

Pin	A±0.25	B±0.13	C±0.38	D±0.25
15	16.33	24.99	30.81	19.28
26	24.66	33.32	39.14	27.51
44	38.38	47.04	53.04	41.28

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.38 .XX ±0.25 .XXX ±0.15 ANG. ±2°
11098		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		CYP		
SCALE	NONE	REV.	A1	UNIT
				mm

NO. REV.	A1	Modify Data	HZF	08/19/2015
	A0	NEW RELEASE	HZF	12/25/2014
	REVISIONS		CHK	DATE