



Recommended P.C.B. Layout



1X2P~1X36P




1X37P, 1X38P, 1X39P




1X40P

SPECIFICATION

Current: 3A
 Withstanding Voltage: 1000V AC/Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C ~ +105°C
 Housing: PA6T(UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 No. Of Contacts: 2~40 Contacts
 RoHS Compliant

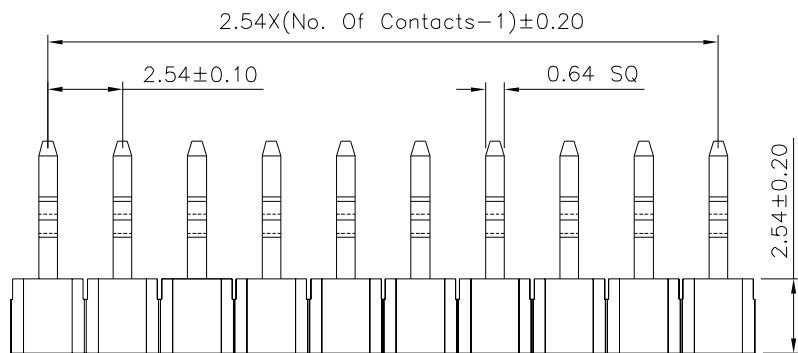

Pin 1

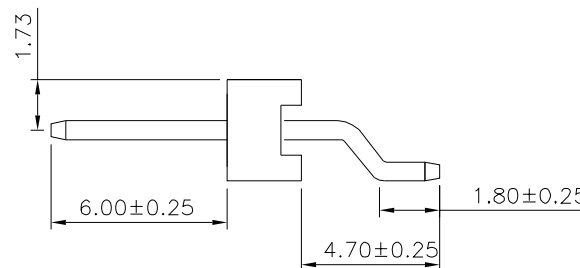

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

11183

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

B1


UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

.XXX ±0.05

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△	B1	Modify Data	HZF	03/20/2025
△	B0	NEW RELEASE	HZF	10/16/2019