

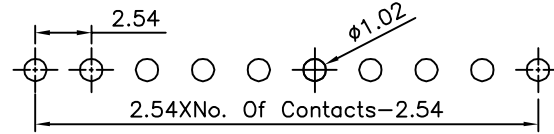
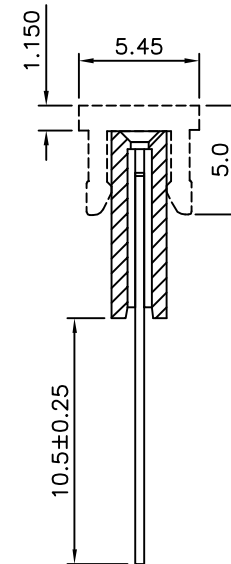


SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

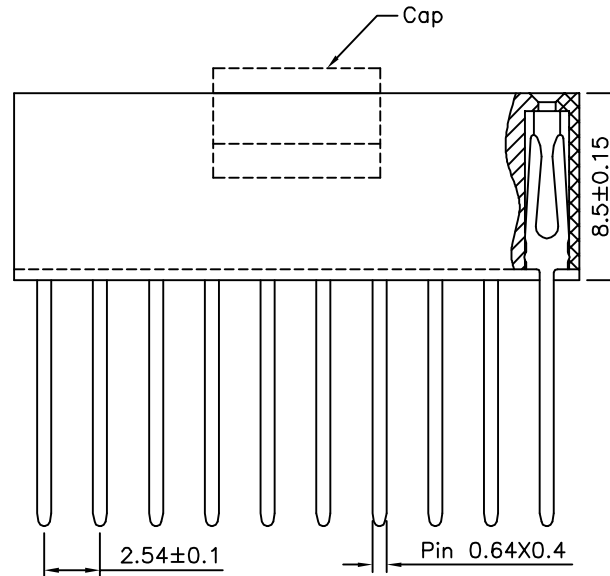

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

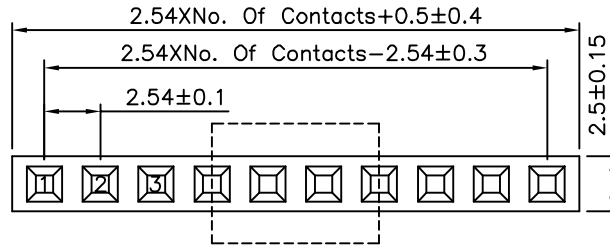

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

11221

SCALE NONE

APPROVED BY EMILY

CHECKED BY HZF

DRAWING BY HAO

REV. A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.25	X* ±2°
.X ±0.20	.X* ±1.5°
.XX ±0.15	.XX* ±1°
.XXX ±0.10	.XXX* ±0.5°

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
A0		NEW RELEASE	HZF	12/05/2014