



**SPECIFICATION**



Current Rating:3 Amps/Contact Max.  
 Contact Resistance:4 Milliohms/Contact Max.  
 Insulation Resistance:5000 Megaohms Min. At 500V  
 Operating Voltage:60V AC/DC  
 Operating Temperatures:-55°C~+125°C  
 Pin(Outer Sleeve):Brass,Gold Flash Over All,Over Nickel  
 Insulator:PPS(UL94V-0),Black  
 RoHS Compliant

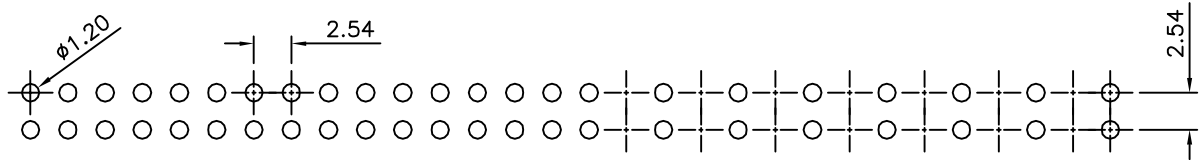

Recommended P.C.B. Layout

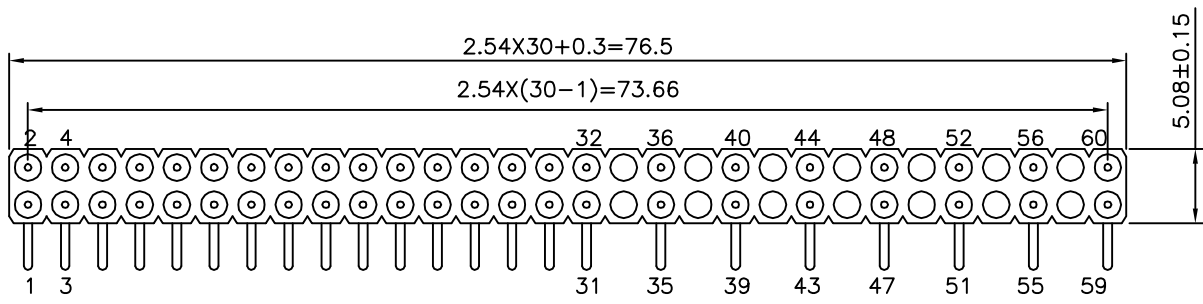

ETE:Remove Pin #33/34/37/38/41/42/45/46/49/50/53/54/57/58

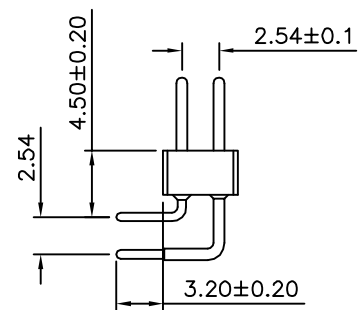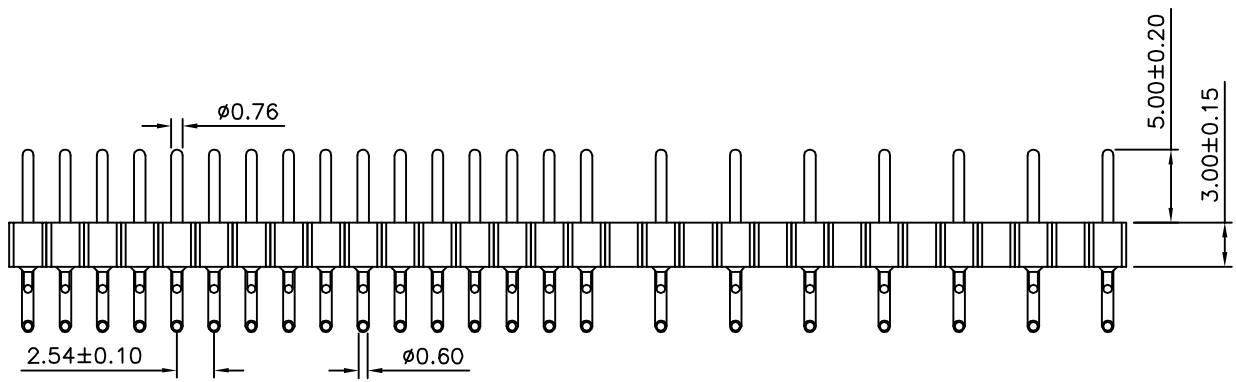

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. $\pm 0.50$ XX $\pm 0.30$ XXX $\pm 0.20$ ANG. $\pm 5^\circ$
11237		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		HAO		
SCALE	NONE	REV.	A0	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	11/07/2014