



SPECIFICATION





Current Rating:2.0 Amps/Contact Max.
 Contact Resistance:20 Milliohms/Contact Max.
 Insulation Resistance:1000 Megaohms Min. At 100V
 Withstand Voltage:450V AC/Minute
 Operating Temperature:-55°C~+105°C
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

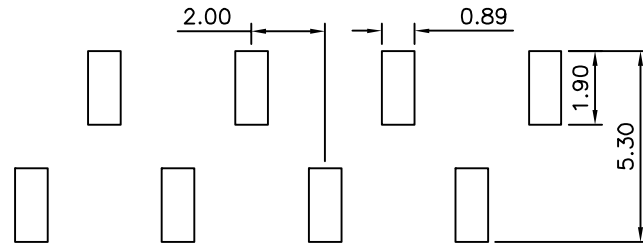

Recommended P.C.B. Layout
Standard Layout

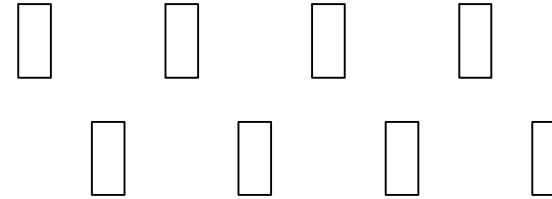

Recommended P.C.B. Layout
Reverse Layout

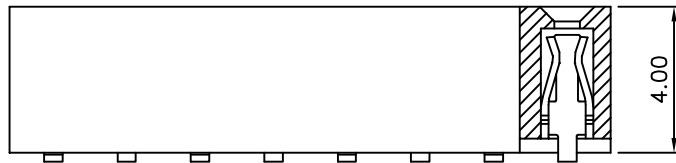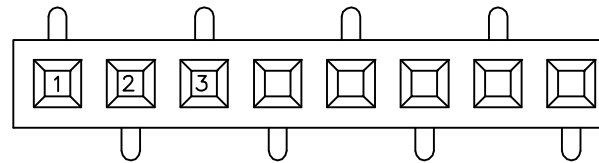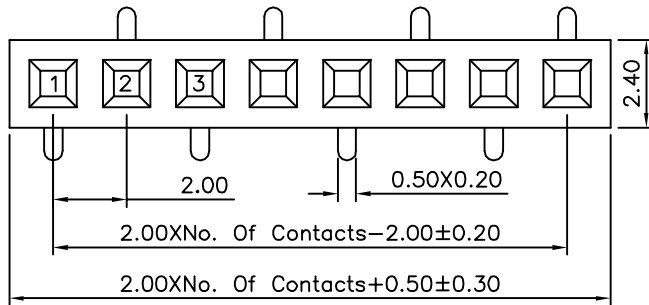

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

11279

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.50
XX ±0.30
XXX ±0.20
ANG. ±5°

UNIT
mm



NO. REV.

NEW RELEASE

REVISIONS

CHK

DATE

AO

REVISIONS

CHK

DATE