

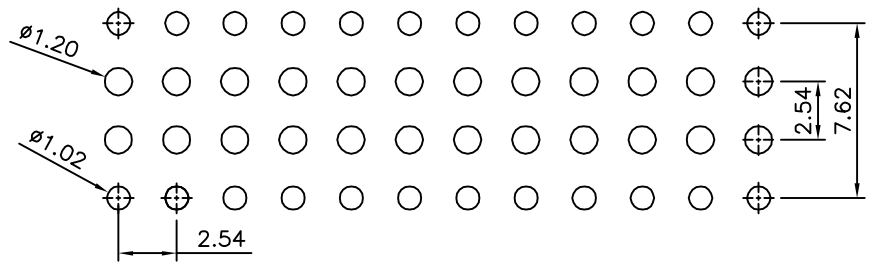
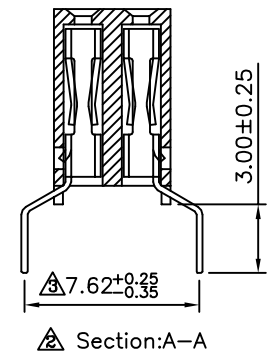


SPECIFICATION

- Current Rating:3.0 Amp
- ▲▲ Withstand Voltage1000V AC/DC
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-40°C~+105°C
- Contact:Phosphor Bronze
- Gold Plated Over Nickel
- ▲ Insulator:LCP+30%G.F.(UL94V-0),Black
- RoHS Compliant

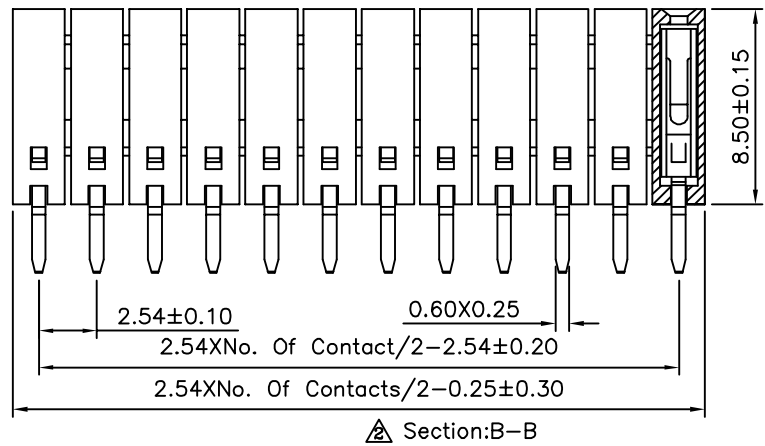

▲ Recommended P.C.B Layout(Top Side) ▲
PCB Board Tolerance±0.05

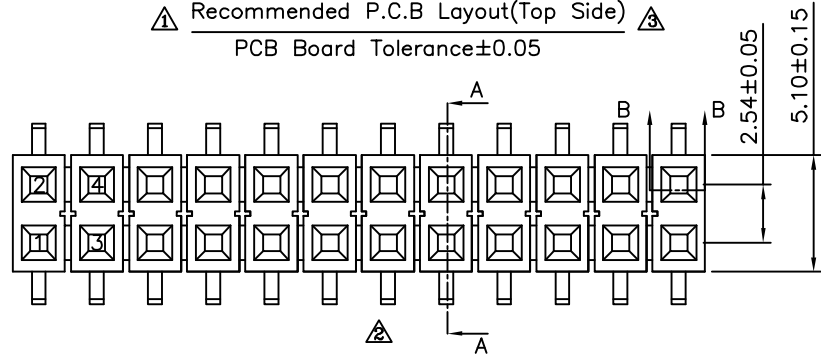

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°					
11296		EMILY			▲ A3	Modify Data	HZF	10/21/2013	
		CHECKED BY			▲ A2	Modify Data	HZF	03/27/2012	
		DRAWING BY			▲ A1	Modify Data	HZF	03/01/2012	
SCALE	NONE	REV.	A3	UNIT	mm	NO.REV.	REVISIONS	CHK	DATE

▲ A0	NEW RELEASE	HZF	01/26/2008
NO.REV.	REVISIONS	CHK	DATE