
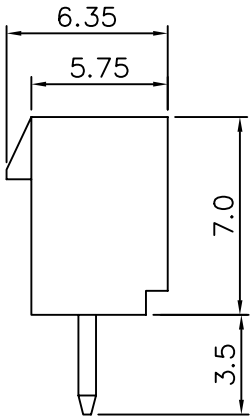
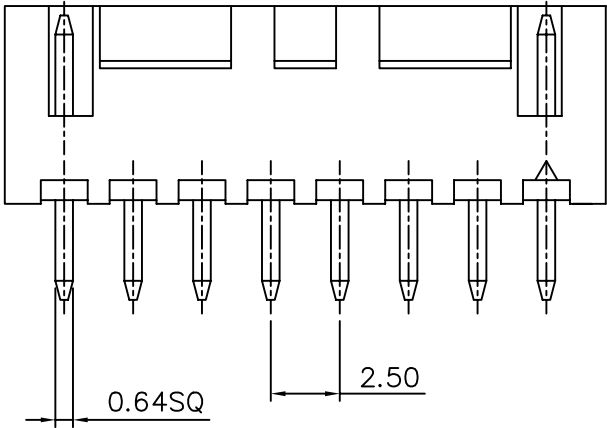
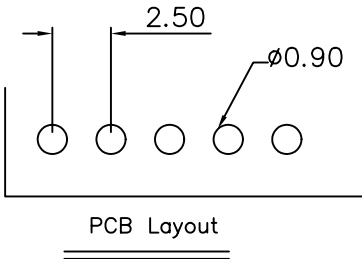


SPECIFICATIONS
Insulator: Nylon 66, UL 94V-0
Or PBT UL 94V-0
Contact: Brass, Tin Plated

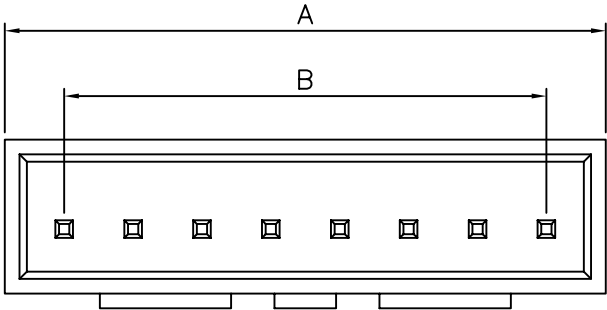

Poles	A	B	Q'TY/Bag
2	7.48	2.50	1000
3	9.98	5.00	1000
4	12.48	7.50	1000
5	14.98	10.00	1000
6	17.48	12.50	1000
7	19.98	15.00	500
8	22.48	17.50	500
9	24.98	20.00	500
10	27.48	22.50	500
11	29.98	25.00	500
12	32.48	27.50	500
13	34.98	30.00	500
14	37.48	32.50	500
15	39.98	35.00	500

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
11300


APPROVED BY MEI
CHECKED BY BECKY
DRAWING BY HZF

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.38
.XX ±0.25
AWG.

SCALE NONE

REV. A0

UNIT mm



NO. REV.

A0 NEW RELEASE
REVISIONS

MEI

DATE