

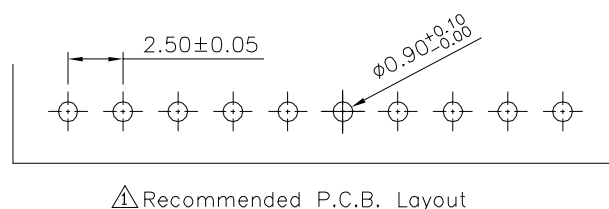


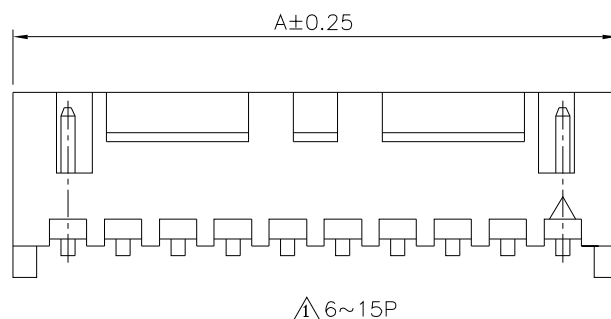



△△ SPECIFICATION

Current Rating:3A(22 AWG)
Voltage Rating:250V AC(RMS)/DC
Withstand Voltage:1000V AC For 1 Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Ambient Temperature Range:-25°C~+85°C
Insulator:PA66(UL94V-0),White
Contact:Brass,Tin Plated
RoHS Compliant

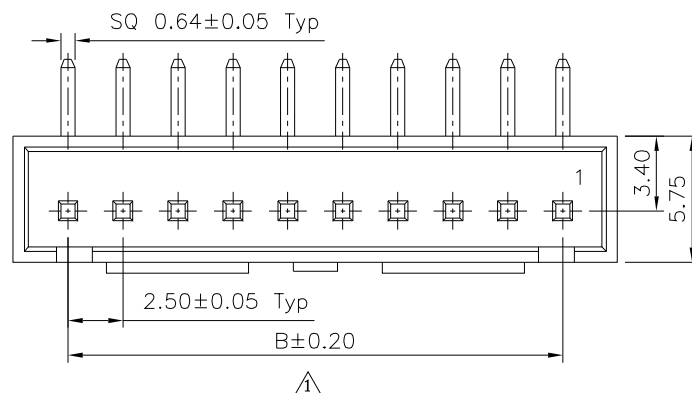

△△	Pin	A	B
△	2	7.48	--
△	3	9.98	5.00
△	4	12.48	7.50
△	5	14.98	10.00
△	6	17.48	12.50
△	7	19.98	15.00
△	8	22.48	17.50
△	9	24.98	20.00
△	10	27.48	22.50
△	11	29.98	25.00
△	12	32.48	27.50
△	13	34.98	30.00
△	14	37.48	32.50
△	15	39.98	35.00

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

11320

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

△ .X ±0.25

.XX ±0.15

.XXX ±0.08

SCALE

NONE

REV.

A2

UNIT mm



NO. REV.

REVISIONS

CHK

DATE

△	A2	Modify Data	HZF	04/22/2019
△	A1	Modify Data	HZF	05/08/2010
△	A0	NEW RELEASE		