


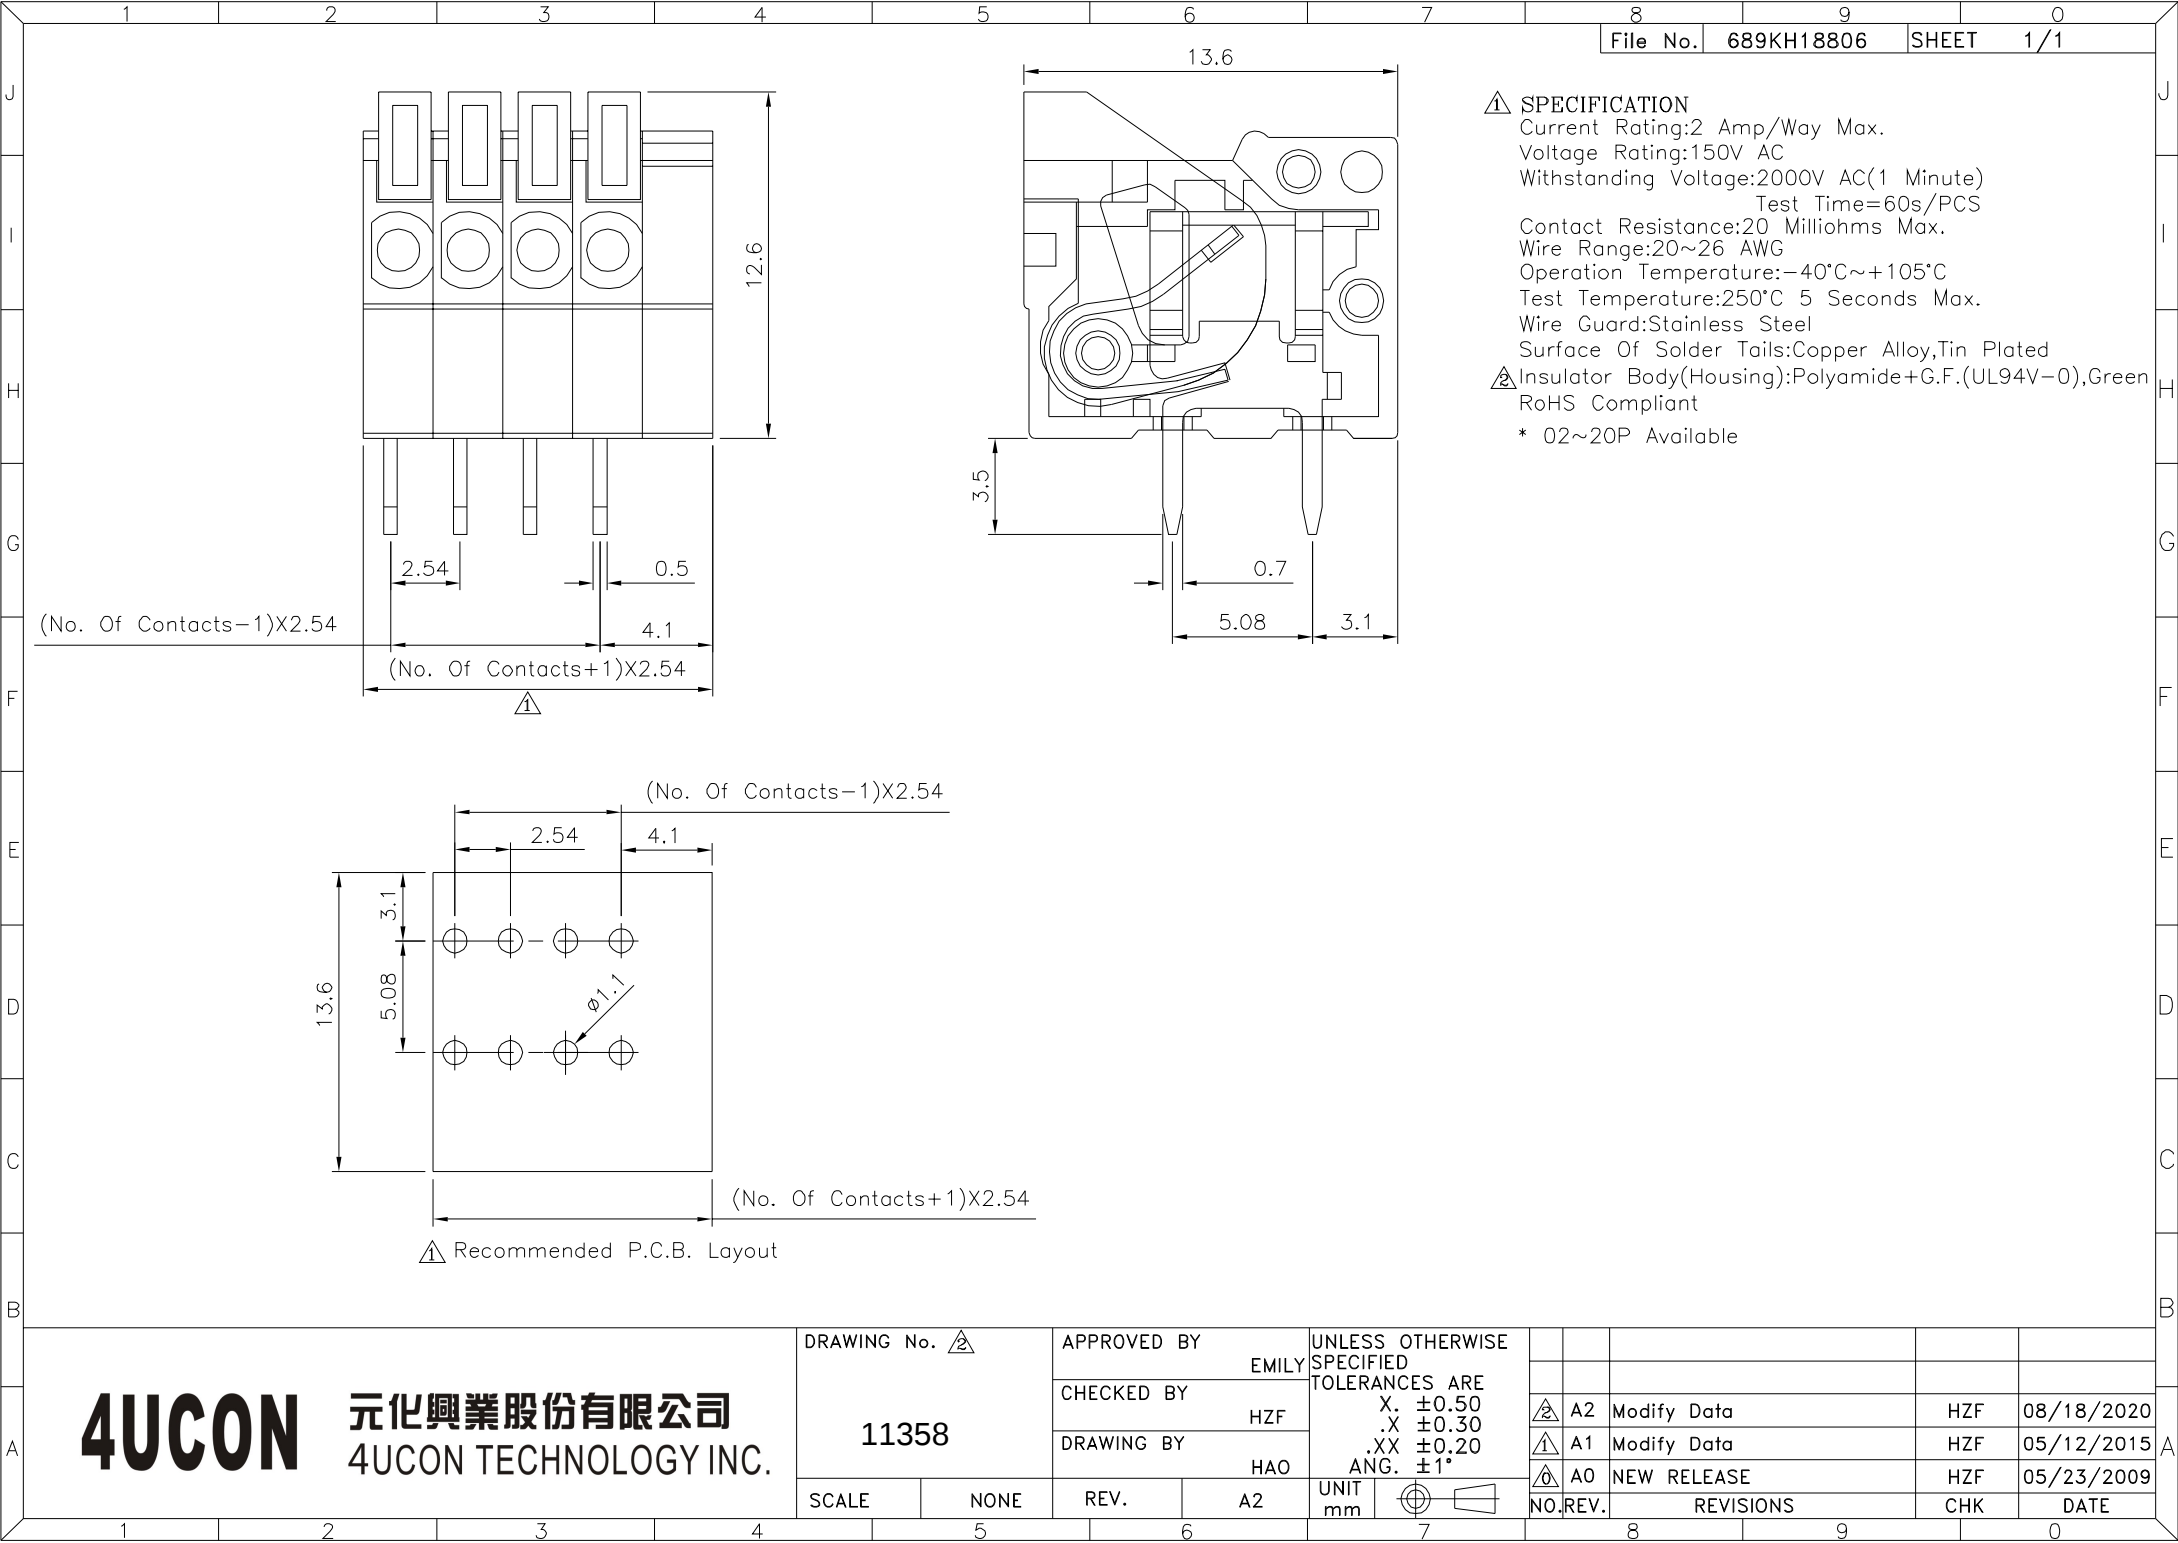

△ SPECIFICATION
Current Rating:2 Amp/Way Max.
Voltage Rating:150V AC
Withstanding Voltage:2000V AC(1 Minute)
Test Time=60s/PCS
Contact Resistance:20 Milliohms Max.
Wire Range:20~26 AWG
Operation Temperature:-40°C~+105°C
Test Temperature:250°C 5 Seconds Max.
Wire Guard:Stainless Steel
Surface Of Solder Tails:Copper Alloy,Tin Plated
△ Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
RoHS Compliant
* 02~20P Available

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.  11358		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°					
		EMILY							
		CHECKED BY							
		HZF							
		DRAWING BY			 A2	Modify Data		HZF	08/18/2020
		HAO			 A1	Modify Data		HZF	05/12/2015
					 A0	NEW RELEASE		HZF	05/23/2009
SCALE	NONE	REV.	A2	UNIT mm	 	NO. REV.	REVISIONS	CHK	DATE